


Dryflo® mist collectors from Donaldson® Torit® are effective and efficient mist filtration solutions, providing a more productive work environment by reducing coolant and machining oil mists in a machine-mountable package. The Dryflo provides high performance technology and easy, predictable maintenance.

- High performance three-stage filtration improves collection efficiency at every stage.
- Provides a cleaner work environment for maximum productivity.
- Reduces risk of mist related hazards.
- Quick and easy filter changes—workers have minimal contact with collected oil.
- Predictable maintenance with a differential pressure gauge.
- Lower plant maintenance costs.
- Mounts directly onto a machining center to collect oil, water-soluble, semi-synthetic and synthetic coolant.
- Low profile.
- 10-year warranty.
- Helps support OSHA Clean Air Standards.




Easy filter changeout

NORMAL OPERATION FOR DMC-MMA, -MMB

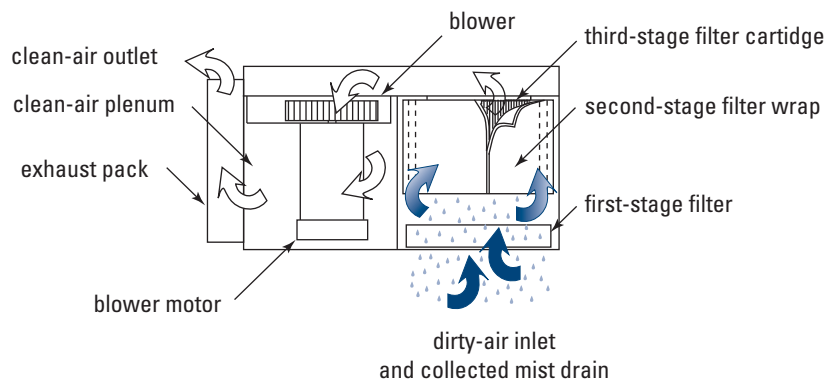

DRYFLO FILTER MEDIA

Dryflo filter media is made from proprietary synthetic media incorporating both small and large fibers for optimum filtration. The smaller fibers provide increased filtration efficiency; after mist is captured and coalesced, the larger fibers allow the oil to drain from the filter. The media also incorporates a proprietary corrugation method which maintains uniform airflow and lower pressure while the media is saturated with oil.

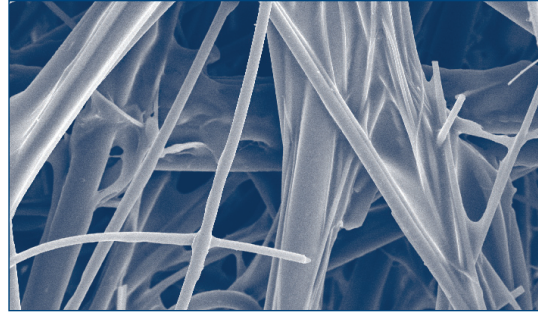

Dryflo Filter Media

HIGH PERFORMANCE THREE-STAGE FILTRATION IMPROVES COLLECTION EFFICIENCY AT EVERY STAGE

FIRST-STAGE



A prefilter that removes larger mist droplets, metal dust and swarf captured by the collector. Wire mesh thin screen and polypropylene mesh are available.

SECOND STAGE

A three-layer wrap of synthetic high-loft material collects small mist drops into larger oil droplets, which drain out of the mist collector.

THIRD-STAGE


Collects, coalesces and drains the finer mist droplets generated by metalworking applications. Along with vertically oriented pleats, the third-stage filter cartridge incorporates the Pleatlock™ media spacing system, which enhances drainage and provides a lower pressure drop, higher filtration efficiency and less re-entrainment of collected mist.

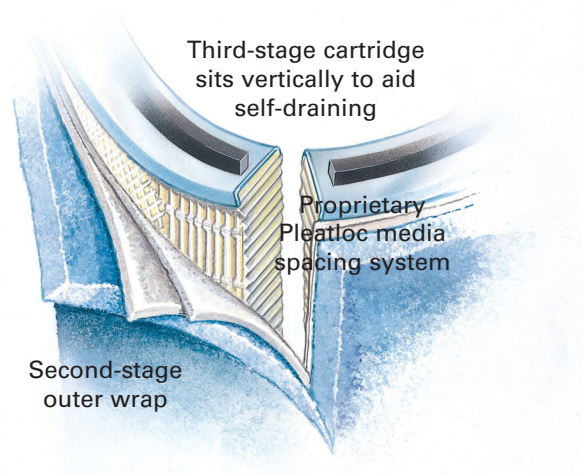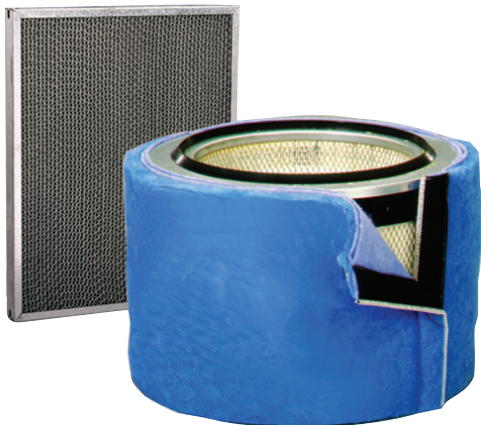

LONG-LASTING EFFICIENCY


The Dryflo cartridge is a proven, highly efficient mist filter that actually increases efficiency over time when collecting soluble oil or synthetic fluid. In tests conducted by the University of North Carolina (UNC), the Dryflo was shown to offer increased efficiency over time, resulting in longer HEPA filter life and reduced HEPA filter replacement costs.

Soluble Oil

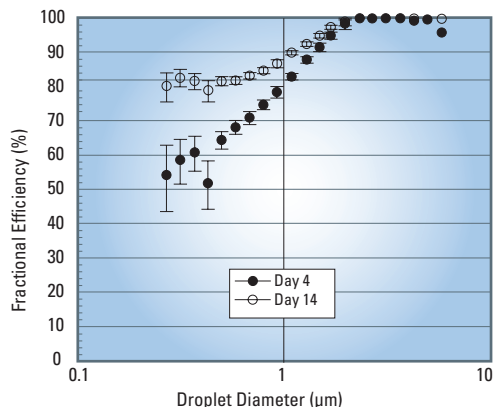

Efficiency vs. droplet diameter for Dryflo cartridge and wrap assembly on days 4 and 14 with soluble oil at an airflow of 1000 cfm. Error bars represent 95% confidence intervals.

Synthetic Fluid

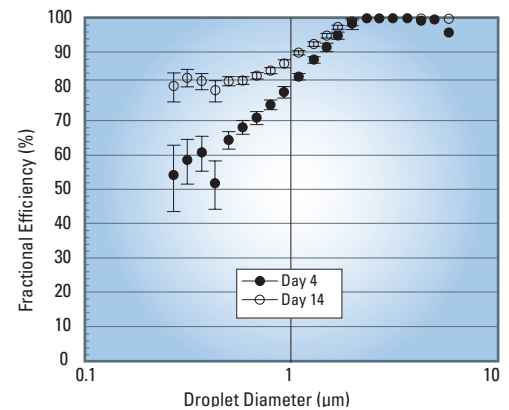

Efficiency vs. droplet diameter for Dryflo cartridge and wrap assembly on days 4 and 14 with synthetic fluid at an airflow of 1000 cfm. Error bars represent 95% confidence intervals.

GAUGING EFFICIENCY

Using UNC’s protocol for evaluating the cartridge efficiency, Dryflo mist collectors with HEPA final filter are a reliable, high performance filtration solution. To prolong HEPA filter life, the upstream filter stages must also be highly efficient. HEPA life depends on the cumulative loading it receives, which in turn, depends on the performance of the upstream collection stages.

Evaluating efficiency as a function of droplet diameter and pressure drop over 14 days, UNC protocol determines the size distribution of droplets generated during a variety of wet machining operations. Droplet sizes ranging from 1.8 micron to 3.2 micron were tested to determine the average efficiency of Dryflo collectors on soluble oil and synthetic fluid.


Average Efficiency of Dryflo on Soluble Oil and Synthetic Fluid

Droplet Size	Dryflo Collector with HEPA	Dryflo Collector without HEPA
1.8 micron	100%	98%
3.2 micron	100%	100%

Note: The data provided in this report is a result of tests performed using the UNC protocol. When comparing these results with other products, be sure the data being compared is derived by the same methodology.

DRYFLO® MIST COLLECTORS

DIMENSIONS & SPECIFICATIONS

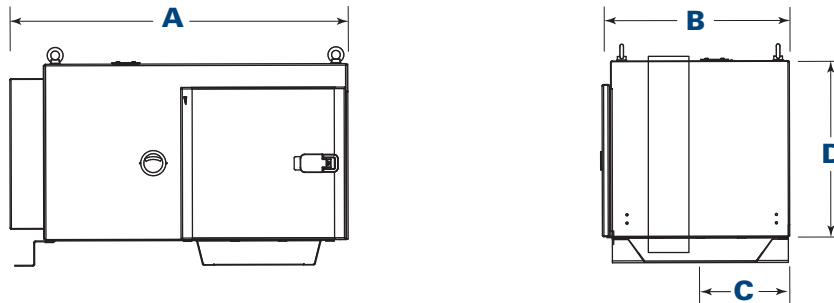

Models	Nominal Airflow (cfm)	No. of Filters	Filter Area (ft ²)	Motor (hp)	Shipping Weight (lbs)	Dimensions (inches)				Sound Level db(A)
						A	B	C	D	
DMC-MMA	390	1	41	0.75	85	30.3	16.0	8.0	15.8	65
DMC-MMB	800	1	82	1.5	165	39.1	20.7	10.4	20.8	69

STANDARD FEATURES & AVAILABLE OPTIONS

COLLECTOR DESIGN	Std	Opt	CARTRIDGE FILTERS (cont'd)	Std	Opt
Mild Steel Construction	X		Dryflo Cartridge Filter with Wrap	X	
Inlet Gasket		X	Fourth-Stage HEPA Filter		X
Inlet Collar		X	Fourth-Stage 95% DOP Filter		X
Inlet Hopper with Legs		X	PAINT SYSTEM		
Inlet Hopper with Vibration Isolators		X	Prime Coated Interior	X	
Inlet Hopper with Flex-Duct		X	Blue Exterior Finish Coating Meets 250-hr. Salt Spray Corrosion Protection Test	X	
Inlet Hopper with Impact Separator		X	Custom Paint Colors		X
Machine Mount	X		Hostile Environment Coating		X
Ceiling Mount		X	ELECTRICAL CONTROLS, GAUGES AND ENCLOSURES		
Collector Stand or Cart		X	Minihelic®* Pressure Gauge	X	
Junction Box		X	Manual Motor Starter		X
Drain Collection Container		X	Type 12 (NEMA & UL) Motor Starter		X
CARTRIDGE FILTERS			Remote Start/Stop		X
First-Stage Wire Mesh	X		Machine Tool Interlock		X
Variety of Other Prefilters		X	Mounted and Prewired Motor Starters		X
High Efficiency First-Stage		X	WARRANTY		
			10-Year Warranty	X	

*Minihelic is a registered trademark of Dwyer Instruments, Inc.

Significantly improve the performance of your collector with genuine Donaldson Torit replacement filters and parts. [Browse our catalog at donaldson.com](http://donaldson.com)



Donaldson Company, Inc.
Torit
P.O. Box 1299
Minneapolis, MN
55440-1299 U.S.A.

Tel 800-365-1331 (USA)
Tel 800-343-3639 (within Mexico)

donaldson.com
donaldson.com

