

T-2000

A self-contained source collector designed to capture fume generated from moderate-to-heavy welding applications.


- Designed to handle one or two welding stations using Ex-Arms.
- Ceiling-mount configuration saves valuable plant floor space and provides optimum range of the Ex-Arms.
- FLUENT®* designed inlet and dust hopper minimizes fume re-entrainment and reduce maintenance expense.
- Automatic pulse-cleaning system for continuous welding operations.
- Proprietary filter cleaning system lengthens filter life.
- Ultra-Web® FR filter cartridges featuring nanofiber technology provide high filtration efficiency and long filter life.
- MERV** 13 filtration efficiency rating per ASHRAE 52.2-2007.
- Recirculation of clean air reduces need for costly make-up air.

* FLUENT is a registered trademark of Fluent, Inc.

** The Minimum Efficiency Reporting Value (MERV) of this filter cartridge has been determined through independent laboratory testing using ASHRAE 52.2 (2007) test standards. The MERV rating was determined at a face velocity of 118 feet per minute and loading up to four inches water gauge. Actual efficiency of any filter cartridge will vary according to the specific application parameters. Dust concentration, airflow, particle characteristics, and pulse cleaning methods all affect filtration efficiency.

TRUNK 2000™ FUME COLLECTOR

DIMENSIONS & SPECIFICATIONS

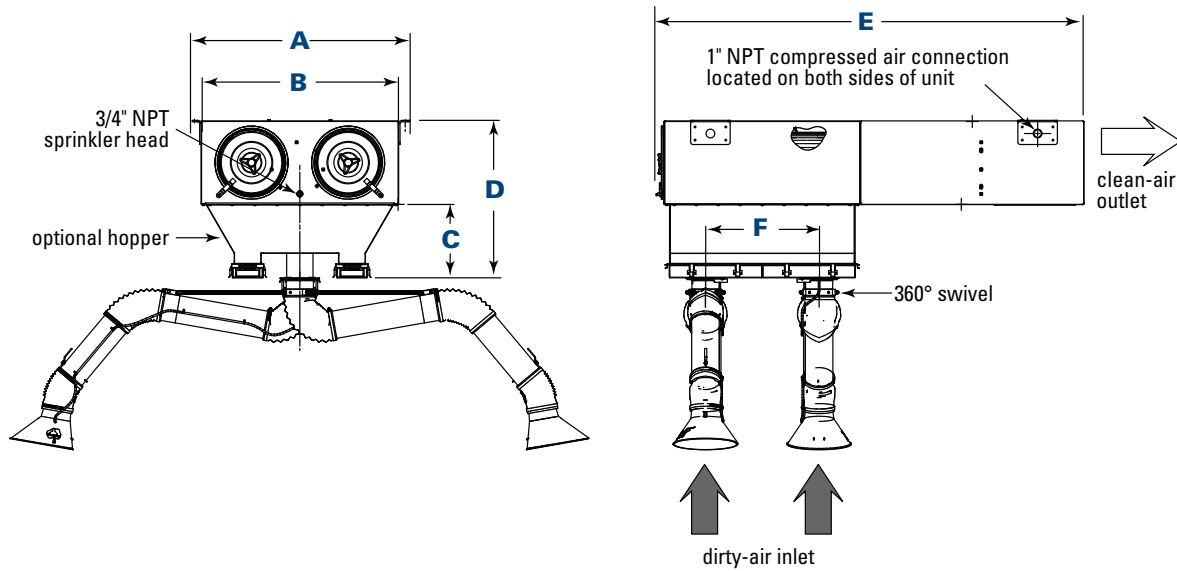

Model	Nominal Airflow* (cfm)	No. of Filters (Ultra-Web FR)	Filter Area (ft ²)	No. of 3/4" Valves	Dimensions (in)						Shipping Weight (lbs)	Sound Level dB(A) [†]	
					A	B	C	D	E	F		Fan	Pulse
T-2000	890	4	636	2	50.0	45.0	16.9	35.9	97.4	25.9	790	71	80.5

STANDARD FEATURES & AVAILABLE OPTIONS

STANDARD	OPTIONAL
Ultra-Web® FR cartridges	Ex-Arm - 6.5', 10', 13'
5 hp TEFC motor	Magnehelic®** gauge
One (1) Ex-Arm with light	Photohelic®** gauge
Sprinkler head	Hopper with re-entrainment baffles and four removal dust pans
110 VAC control box 208/230/460/60/3 voltage	Solenoid valve silencer
10-year warranty	

* Based on clean filters, per Ex-Arm.

** Magnehelic and Photohelic are registered trademarks of Dwyer Instruments, Inc.

† db(A) sound levels are an average of measurements made in a laboratory environment. Installed sound levels will vary depending on the measurement location, operating conditions, and installation.

Significantly improve the performance of your collector with genuine Donaldson Torit replacement filters and parts. [Browse our catalog at donaldson.com](https://www.donaldson.com)



Donaldson Company, Inc.
Torit
P.O. Box 1299
Minneapolis, MN
55440-1299 U.S.A.

Tel 800-365-1331 (USA)
Tel 800-343-3639 (within Mexico)

donaldson.com
donaldson.com



Data Sheet Trunk 2000 (08/11)

© 1999 Donaldson Co., Inc. All Rights Reserved. Information in the document is subject to change without notice.