

Donaldson®
Torit®



EASY DUCT™

Technical Manual

The New Standard for Industrial
Round Duct Applications from
Donaldson Torit

Simple to install,
no special tools
or training required.

Clamp-together components
can be taken apart
and reused.

Flexible,
easily connects to
existing duct.

Components and adapters
to fit every system.

Adjustable Easy Duct fittings
simplify connections.

Smooth Interior Surface
helps prevent clogs.



TABLE OF CONTENTS

| <u>DESCRIPTION</u> | <u>PAGE</u> |
|---|-------------|
| ADJUSTABLE NIPPLE ASSEMBLY FOR DRY APPLICATION | 36 |
| ADJUSTABLE O-RING MATERIAL | 6 |
| AIR VOLUME CHART | 39 |
| BLAST GATE (AUTO) | 19 |
| BLAST GATES (MANUAL & ENERGY SAVING) | 20-21 |
| BLEED-IN VALVE | 17 |
| BRANCH STYLES | 33 |
| CEILING HANGING METHOD | 25 |
| CLAMP DIAGRAM | 5 |
| CLAMP GASKETING ALTERNATIVES | 6 |
| CONSTRUCTION METHODS | 7 |
| DIVERTER VALVE | 22 |
| DRY SYSTEM INSTALLATION | 32 |
| ELBOWS & FITTINGS | 8 |
| ENGINEERING SPECIFICATIONS | 3 |
| FLANGED DUCT SPECIFICATIONS | 4 |
| FLASHING (WALL & ROOF) | 23 |
| GAUGE LIMITATIONS | 10 |
| GAUGE UPGRADES FOR ELBOWS | 9 |
| GRIPPLE HANGER SYSTEM | 26 |
| HIGH TEMP FUME OR EXHAUST APPLICATIONS | 30 |
| IN-LINE SOUND SILENCER | 28 |
| INSTALLING AN IN-CUT OR TAP-IN | 18 |
| LABOR GUIDELINES & WHAT TO BE AWARE OF WHEN ORDERING | 29 |
| LEAKAGE | 12 |
| NO-LOSS STACK-HEAD | 28 |
| OIL MIST OR WET APPLICATION FOR PIPE | 37 |
| OIL MIST OR WET APPLICATION FOR INSTALLATION OF ADJUSTABLE NIPPLE | 38 |
| PIPE STAND WITH BRACKET HANGER | 25 |
| REDUCER STYLES | 34 |
| RIGID & ULTRA FLEX HOSE | 16 |
| RUBBER FLEX HOSE | 15 |
| SIZING A SYSTEM & CFM/FPM CHART | 13 |
| SIZING BRANCHES | 35 |
| SIZING ELBOWS & SPECIAL COMPONENTS | 14 |
| STRUCTURAL INTEGRITY & COLLAPSIBILITY | 11 |
| TAKE-OFF SHEET | 40 |
| WALL MOUNTING | 24 |
| WET SYSTEM INSTALLATION | 31 |

Engineering Specifications

DUCT-WORK:

All duct-work shall be of a clamp-together design using a die-formed, rolled edge in which is then joined together by a single lever clamp of similar material. All clamp together ducting shall be of continuous laser welded construction along the longitudinal seam of the rolled form duct with the exception of the 3” which is lock formed. All connections shall have Nitrile seal in clamp for standard installs and a Gortex seal for mist or food grade applications.

Duct material sheet blanks are five feet long, which is then rolled and fused together with a laser weld process along the longitudinal seam.

The ends of the duct are then pressed in a die to form a rolled bead on each end of the duct. This rolled-end is used for clamping components together as well as reinforcement every 5 feet.

COMPONENT MATERIAL:

Straight duct and other connecting components to be constructed of galvanized sheets produced by the continuous galvanizing process in which conforms to ASTM-A-527, and commercial quality ASTM A-527. Galvanized sheeting is produced with a minimum spangle.

Stainless duct-work is constructed of stainless steel to be 304 2B finish (2B finish in annealed, pickled and bright cold rolled).

ADDITIONAL INFORMATION:

For more information regarding gauges of materials, temperature ratings etc. Refer to charts contained in this Technical-Specification Manual.


Duct diameters for Easy Duct as follows:

| | |
|-----------|---|
| Easy Duct | 3” through 17” available in 1” increments |
| | 18” through 24 ” available in 2” increments |

NOTE: 3” DUCT IS LOCK FORM, NOT LASER WELDED

Flange Duct Specification

VAN-STONE FLANGE CONNECTION CROSS SECTION

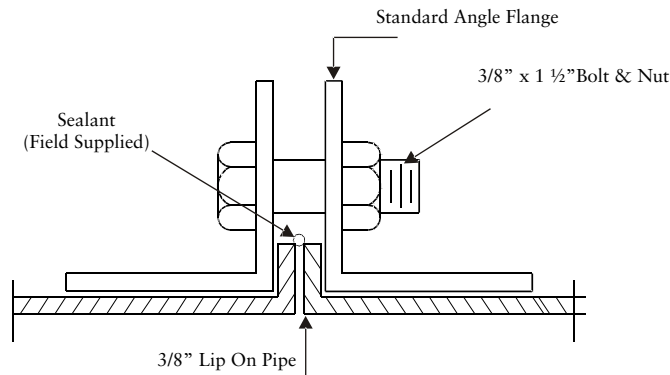


- A) “Flanged” = Material sheet blanks are 78.75” lg. and rolled with a longitudinal lock formed seam. A angle flange made from angle bar stock rolled on edge is placed on the end of the duct using a Van Stone Flange Connection as illustrated above. (See Easy Duct Catalog for sizes)
- B) Duct should be supported as follows:
 * 3”-10” diameter == 12’ -15’ centers
 * 11”-24” diameter == 15’- 20’ centers
 Supports should be installed to provide lateral stability to entire piping system. However, each installation differs and should be evaluated properly.
- C) Duct diameters for FLANGE DUCT as follows:
 3” through 18” available in 1” increments
 20” through 40 ” available in 2” increments

COMPONENT MATERIAL:

- A) Components constructed of galvanized steel sheets produced by the Continuous Galvanizing Process, and Commercial Quality-ASTM A-526. Galvanized sheeting is produced with a minimum spangle with coating weight of G-90.
- B) Components constructed of stainless steel will be of 304 2B finish. {2B finish is annealed, pickled, and bright cold rolled
- C) Components constructed of other material- Contact Easy Duct.


Clamp Diagram

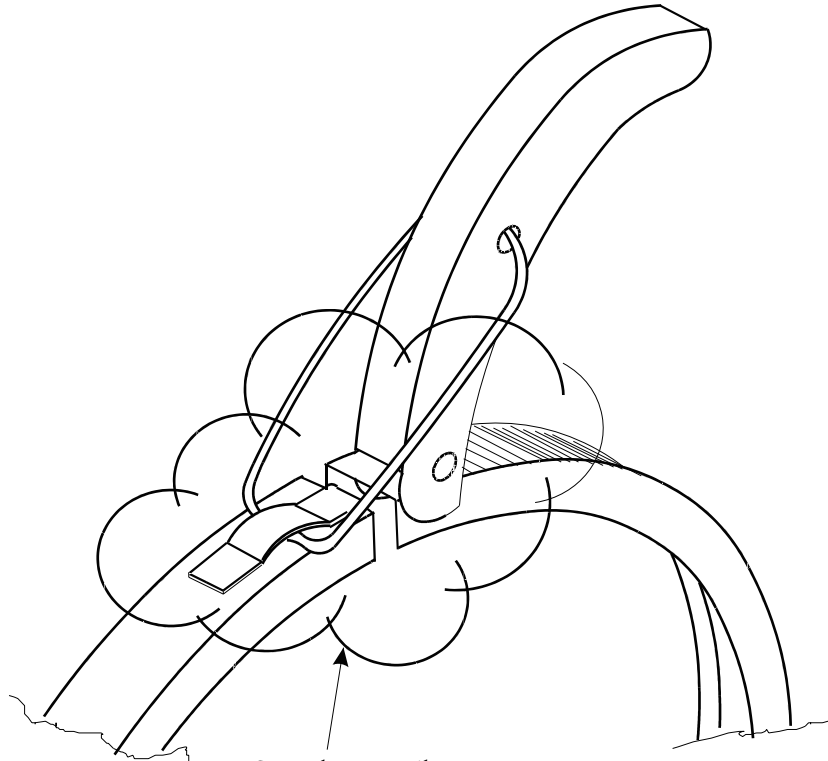



Seal Will Be Installed And Folded Over At the Factory. It Will Release Easily Due To The Pressure Sensitive Backing.

See Below Detail


While Clamping Down, Slowly Tuck Extra Seal Underneath The Opposing Side Of Clamp.



Position # 1

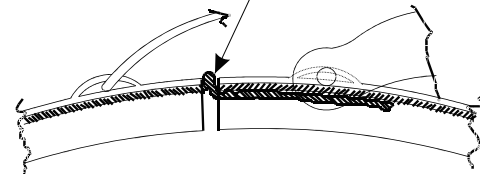

Position # 2

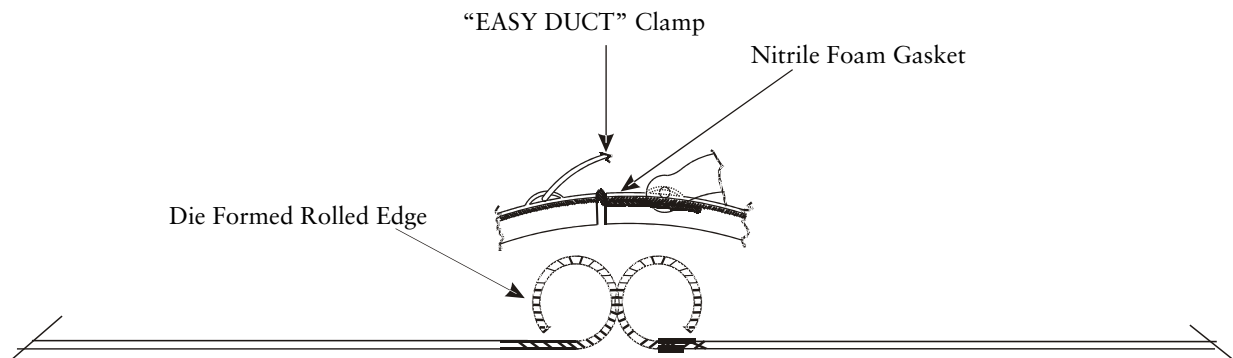

Clamp Gasketing Alternatives Adjustable Nipple O-Ring Material

CLAMP GASKETING ALTERNATIVES

1. NITRILE GASKET-STANDARD

- Service temperature: -104 deg to +158 deg with an intermittent max temp of +194 deg.
- Standard seal installed in clamp
- The standard specifications meet ASTM D 1056.
- 3/8" Gasket for 4",5",6"
- 1/2 " Gasket for 7" and larger

2. INERTECH PTFE GASKET TAPE

- Service temperature -450 DEG F. to 600 DEG F
- FDA suitable for use in food and pharmaceutical industries
- Not degraded by any common chemicals [0-14 PH range]
- Non-contaminating and non-aging
- 3/8" gasket for 4",5",6"
- 1/2" gasket for 7" and larger

TEMPERATURE RATINGS

1. Black rubber O-Ring material

- Service temperature:
-40 DEG F. TO 250 DEG F.
- 70 Duro-Meter hardness

2. Red rubber silicon O-Ring material


- Service temperature: -100 DEG F. to 500 DEG F.
- FDA suitable for use in food and pharmaceutical industries
- Specification: ZZ-R-765 Class 2A and 2B grade 70 AMS-3304E and 3304F and 3303G

3. Diverter gasket 200 DEG F.
4. (RFH) rubber hose 275 DEG F.
5. UHMW seals in blast gates 180 DEG F.
6. Teflon seals 300 DEG F.
7. Galvanized ducting 500 DEG F.
8. Stainless steel ducting 800 DEG F.
9. RTV high temperature caulk 500 DEG F.
10. Standard caulk up to 250 DEG F.

Construction Methods


1. LONGITUDINAL LASER WELD SEAM FOR “EASY DUCT” PIPE

* Applies to all straight duct up to 22”, and adapters, nipples and collars and most elbows.

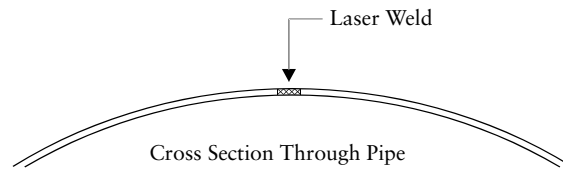


2. STANDING SEAM

* Applied to segmented elbows, offsets and end caps.

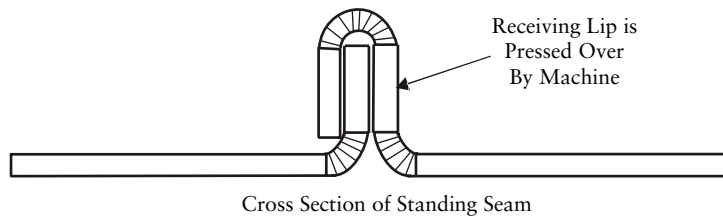


3. LONGITUDINAL LOCK FORM SEAM ON FLANGE PIPE

* Applies to all straight duct lengths flanged.

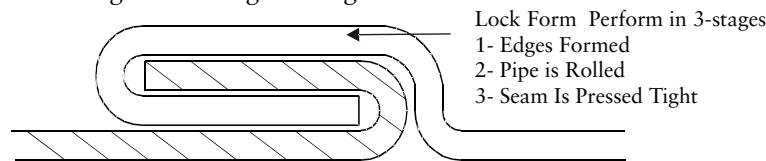


4. HEMMED, SPOT WELDED SEAM CONSTRUCTION AND EASY DUCT COLLAR CONNECTION

* Applies to all branches, reducers, in-cuts etc.

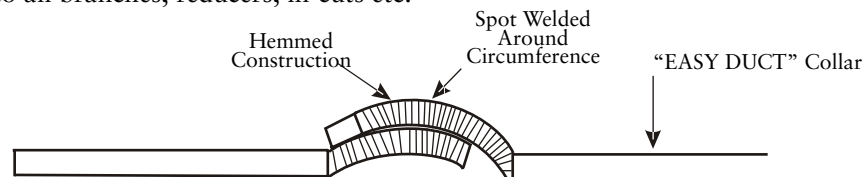

5. STANDARD SEAM JOINING METHOD ON HOODS BOXES TRANSITIONS AND SPECIALTY ITEMS

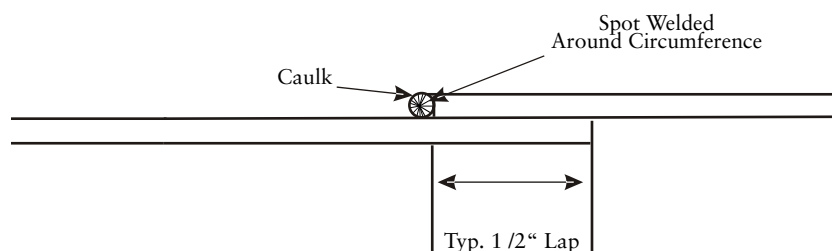

Elbows & Fittings

ELBOWS


- A) Standard elbows will have a center line radii of 1 x dia & 1.5 x dia as specified in catalog .Longer radius elbows are available upon request.
- B) Standard elbows 3” to 7” are pressed formed, and 8” and larger are gored construction with a lock form standing seam every 15 degrees. Gore type elbows are produced as follows:

| <u>ANGLE IN DEGREES</u> | <u>NUMBER OF GORES @ 15DEG</u> |
|-------------------------|--------------------------------|
| 0 TO 30 | 3 |
| 31 TO 45 | 4 |
| 46 TO 60 | 5 |
| 61 TO 90 | 7 |


FITTINGS

- A) Branch fittings are produced to have a concentric design, as they taper to a specific dimension. Joints are lapped, spot welded, cleaned, and painted with KRYLON Industrial Tough Coat, Acrylic Enamel #1760 Aluminum. Seams are sealed with 3M Scotch-Seal (R) 2084 grey sealant.
- B) Fitting gauges vary from 22 to 20 gauge depending on the configuration of the branch or fitting. If exact gauge is required, contact factory for more information.
- C) All standard branch fittings are produced on a 30 degree angle, however other angles are available upon request.
- D) As a normal practice, internal welds are not cleaned or painted. Cleaning or painting the inside is an option based on the customer’s application and is done only at the customer’s request with an **upcharge**.

EXAMPLES OF VARIOUS FITTINGS AVAILABLE

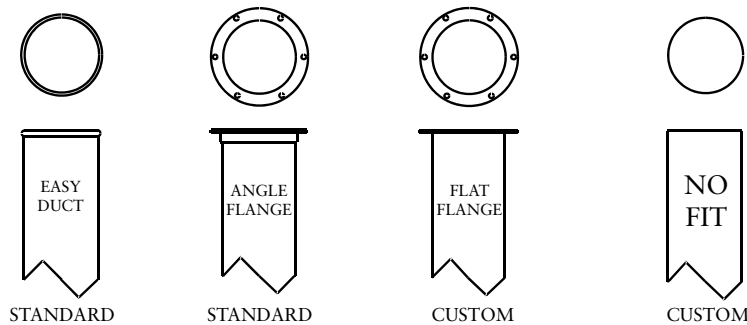

INFORMATION NEEDED TO ORDER A CUSTOM FLANGE

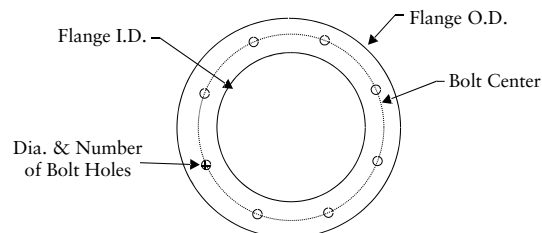

Gauge Upgrades for Elbows

| ELBOW DIAMETER | GALV STD GAUGE | SS STD GAUGE | ONE GAUGE UPGRADE | MAX LSB STYLE ELBOW |
|----------------|----------------|--------------|-------------------|---------------------|
| 3" | 24 | 14 TUBED | N/A | N/A |
| 4" | 24 | 14 TUBED | N/A | N/A |
| 5" | 24 | 14 TUBED | N/A | N/A |
| 6" | 24 | 14 TUBED | N/A | N/A |
| 7" | 24 | 22 | 20 | 16 |
| 8" | 22 | 22 | 20 | 16 |
| 9" | 22 | 22 | 20 | 16 |
| 10" | 22 | 22 | 20 | 16 |
| 11" | 22 | 22 | 20 | 16 |
| 12" | 22 | 22 | 20 | 16 |
| 13" | 20 | 20 | 18 | 16 |
| 14" | 20 | 20 | 18 | 16 |
| 15" | 20 | 20 | 18 | 16 |
| 16" | 20 | 20 | 18 | 16 |
| 17" | 20 | 20 | 18 | 16 |
| 18" | 20 | 20 | 18 | 16 |
| 19" | 20 | 20 | 18 | 16 |
| 20" | 20 | 20 | 18 | 16 |
| 21" | 20 | 20 | 18 | 16 |
| 22" | 20 | 20 | 18 | 16 |
| 23" | 20 | 20 | 18 | 16 |
| 24" | 20 | 20 | 18 | 16 |
| 26" | 18 | 18 | 18 | 16 |
| 28" | 18 | 18 | 18 | 16 |
| 30" | 18 | 18 | 18 | 16 |
| 32" | 18 | 18 | 18 | 16 |
| 34" | 18 | 18 | 18 | 16 |
| 36" | 18 | 18 | 16 | 16 |
| 38" | 18 | 18 | 16 | 16 |
| 40" | 18 | 18 | 16 | 16 |

Gauge Limitations

| DIA | PIPE | | STD GAUGE | NIPPLE | | STD GAUGE | MAX GALV GA | | MAX SS GA UPGRADE |
|-----|------|--------|-----------|--------|--------|-----------|-------------|--------|-------------------|
| | ID | OD | | ID | OD | | PIPE | NIPPLE | |
| 3" | 3.05 | 3.11 | 22 | 3.16 | 3.22 | 23 | N/A | N/A | N/A |
| 4" | 3.86 | 3.92 | 22 | 3.98 | 4.04 | 22 | 22 | 22 | 22 |
| 5" | 4.86 | 4.92 | 22 | 4.98 | 5.04 | 22 | 22 | 22 | 22 |
| 6" | 5.86 | 5.92 | 22 | 5.98 | 6.04 | 22 | 22 | 22 | 22 |
| 7" | 6.9 | 6.96 | 22 | 7.01 | 7.063 | 22 | 20 | 20 | 20 |
| 8" | 7.9 | 7.96 | 22 | 8.01 | 8.063 | 22 | 18 | 18 | 20 |
| 9" | 8.9 | 9.5 | 22 | 9.01 | 9.063 | 22 | 18 | 18 | 20 |
| 10" | 9.94 | 10 | 22 | 10.05 | 10.067 | 22 | 18 | 18 | 20 |
| 11" | 11 | 11.06 | 22 | 11.12 | 11.18 | 22 | 18 | 18 | 18 |
| 12" | 12 | 12.06 | 22 | 12.12 | 12.18 | 22 | 18 | 18 | 18 |
| 13" | 13 | 13.074 | 20 | 13.12 | 13.19 | 20 | 18 | 18 | 18 |
| 14" | 14 | 14.074 | 20 | 14.12 | 14.19 | 20 | 18 | 18 | 18 |
| 15" | 15 | 15.074 | 20 | 15.12 | 15.19 | 20 | 18 | 18 | 18 |
| 16" | 16 | 16.074 | 20 | 16.12 | 16.19 | 20 | 18 | 18 | 18 |
| 17" | 17 | 17.074 | 20 | 17.07 | 17.15 | 20 | 18 | 18 | 18 |
| 18" | 18 | 18.074 | 20 | 18.12 | 18.19 | 20 | 18 | 18 | 18 |
| 19" | 19 | 19.074 | 20 | 19.12 | 19.19 | 20 | 18 | 18 | 18 |
| 20" | 20 | 20.074 | 20 | 20.12 | 20.19 | 20 | 18 | 18 | 18 |
| 21" | 21 | 21.074 | 20 | 21.12 | 21.19 | 20 | 18 | 18 | 18 |
| 22" | 22 | 22.074 | 20 | 22.12 | 22.19 | 20 | 18 | 18 | 18 |
| 23" | 23 | 23.074 | 20 | 23.12 | 23.19 | 20 | 18 | 18 | 18 |
| 24" | 24 | 24.074 | 20 | 24.12 | 24.19 | 20 | 18 | 18 | 18 |

NOTE: PIP NIPPLES MAX LENGTH SAME AS PIP 6/12/03

Structural Integrity

STRUCTURAL INTEGRITY

The Laser Welded Easy Duct System has been used in many different industrial applications, and under various negative static pressures.

The typical design range we see in our applications, range from -2" wg to -28 wg, however we have some systems operating at vacuums of -32" wg to -42" wg under normal operating parameters. Should these levels of static pressure be required, we suggest an alternative seal be used in the clamp such as the white Gortex Seal. This increases the sealing properties on the connection joint.

Please take into account that our pipe comes in 5' lengths with a rolled lip on each end, thus providing reinforcement every 5', which presents a sound structural design that should be stronger than any pipe in its class.

COLLAPSIBILITY STRENGTH OF "EASY DUCT" PIPING

Each size of piping has been tested for strength against collapsing. The piping was exposed to constant positive pressure and constant vacuum. Each pipe was exposed to a maximum capacity of the test equipment of 80" WG of vacuum and positive pressure. None of the pipe showed any form of deformation during the test. Pipe and fittings must be installed in accordance with Easy Duct's standard specifications and normal good workmanship practices.

Leakage

All fit together ducting systems allow for some degree of leakage. ‘EASY DUCT’ ducting is no exception and is not sold as an airtight system. In addition to standard Nitrile foam gasket, Easy Duct offers special clamp gasket material for high heat and enhanced sealing. Further, the applying of sealants to the individual rolled ends can enhance the tightness of the system. However, the “EASY DUCT” system is sold as a quick way of installing and modifying duct-work while at the same time retaining the usability of each component. In short, “EASY DUCT” is meant to be able to be taken apart, re-assembled, stored or moved. Completely eliminating the possibility for leakage jeopardizes the inherent benefits of the duct.

LEAKAGE CLASS

While Easy Duct is currently unaware of any method of evaluating dust collection piping alone, the following data is presented using the criteria for all duct, including HVAC. This data is presented only for the purpose of indicating acceptability of the Easy Duct in dust/fume removal in a negative pressure situations and should not be confused with the ducting that uses tape or gaskets as sealant in the positive conveyance of air.

LEAKAGE CLASS DETERMINED IN ACCORDANCE WITH SMACNA

| Duct Size | Avg. leakage per 100 ft. | | SMACNA CLASS |
|-----------|--------------------------|---------|--------------|
| | 5” SP | 10” SP | |
| 4” 6” | 5 CFM | 6 CFM | 3 |
| 7” 10” | 2.5 CFM | 3.5 CFM | 3 |
| 11” 24” | 2 CFM | 4 CFM | 3 |

LEAKAGE RATE

Standard “EASY DUCT” is designed to provide tight sealing and efficient airflow under negative pressures. To that end we are providing the following information for piping situations where fan sizing is of extreme importance. The following data was obtained using standard components and was performed in accordance with the SMACNA, “HVAC AIR DUCT LEAKAGE TEST MANUAL”. The information gives the leakage rate per joint of duct at various pressures. To utilize the chart, count the number of clamps (this equals the number of pieces) per size and multiply by the number given beside the corresponding diameter and under the applicable pressure. These numbers assume that the product is correctly installed; free of dents in the joining ends and that the gasket in place. Special gasket material and sealants will increase the sealing capabilities.

LEAKAGE RATE IN CFM PER JOINT

| Dia Inches | 3 WG | 5 WG | 7.5 WG | 10 WG | 15 WG | 20 WG | 25 WG | 30 WG |
|------------|------|------|--------|-------|-------|-------|-------|-------|
| 4 | 0.20 | 0.25 | 0.30 | 0.30 | 0.35 | 0.50 | 0.60 | 0.80 |
| 5 | 0.20 | 0.25 | 0.30 | 0.30 | 0.35 | 0.50 | 0.60 | 0.80 |
| 6 | 0.20 | 0.25 | 0.30 | 0.30 | 0.35 | 0.50 | 0.60 | 0.80 |
| 7 | 0.20 | 0.25 | 0.30 | 0.30 | 0.35 | 0.50 | 0.60 | 0.80 |
| 8 | 0.20 | 0.25 | 0.30 | 0.30 | 0.35 | 0.50 | 0.60 | 0.80 |
| 9 | 0.20 | 0.25 | 0.30 | 0.30 | 0.35 | 0.50 | 0.60 | 0.80 |
| 10 | 0.20 | 0.25 | 0.30 | 0.30 | 0.35 | 0.50 | 0.60 | 0.80 |
| 12 | 0.30 | 0.30 | 0.40 | 0.40 | 0.40 | 0.60 | 0.70 | 0.90 |
| 14 | 0.30 | 0.30 | 0.50 | 0.70 | 0.80 | 0.80 | 0.90 | 1.10 |
| 16 | 0.30 | 0.40 | 0.60 | 0.70 | 1.00 | 1.10 | 1.20 | 1.40 |
| 18 | 0.40 | 0.40 | 0.70 | 0.80 | 1.10 | 1.30 | 1.50 | 1.70 |
| 20 | 0.40 | 0.60 | 0.80 | 0.90 | 1.20 | 1.50 | 1.70 | 2.00 |
| 22 | 0.40 | 0.60 | 0.80 | 1.10 | 1.40 | 1.50 | 2.00 | 2.20 |

Sizing a System CFM/FPM Chart

Easy Duct offers assistance to those sales people and customers who have never designed a ducting system before. We can assist you in determining the correct duct size and configuration that will supply you with the correct flow.

We have the ability to assist customers in designing a blast-gated system; taking into account flow dynamics that will be affected by blast gates. While blast gates can be used to effectively utilize an undersized filtering system, they can also destroy the flow if not properly placed.

USING THE CFM / FPM CHART

Different materials need to be moved at different velocities so as to prevent the material from falling out of the air stream. For example: wood chips and saw dust flow well at 4500 feet per minute. Referring to the chart, you will see that a 4” duct will convey 395 CFM at 4500 FPM. This will mean that a 4” pick-up on a machine will take 395 CFM from your filtering system; or working in reverse, if you know that a machine will require approximately 400 CFM to remove the waste, then you should design a 4” duct for the purpose.

| AIR VOLUME IN DUCTS IN CUBIC FEET PER MINUTE (CFM) | | | | | | | | | | | |
|--|-----------------------------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| DUCT Ø | VELOCITY IN FEET PER MINUTE (FPM) | | | | | | | | | | |
| | 2000 | 2500 | 3000 | 3500 | 4000 | 4500 | 5000 | 5500 | 6000 | 6500 | 7000 |
| 3 | 100 | 125 | 150 | 170 | 195 | 220 | 245 | 270 | 295 | 320 | 345 |
| 4 | 175 | 220 | 260 | 305 | 350 | 395 | 440 | 485 | 525 | 570 | 615 |
| 5 | 275 | 340 | 410 | 475 | 545 | 615 | 680 | 750 | 820 | 885 | 955 |
| 6 | 395 | 490 | 590 | 685 | 785 | 885 | 980 | 1080 | 1180 | 1275 | 1375 |
| 7 | 535 | 670 | 800 | 935 | 1070 | 1205 | 1335 | 1470 | 1605 | 1735 | 1870 |
| 8 | 700 | 875 | 1050 | 1220 | 1395 | 1570 | 1745 | 1920 | 2095 | 2270 | 2445 |
| 9 | 885 | 1105 | 1325 | 1545 | 1765 | 1990 | 2210 | 2430 | 2650 | 2870 | 3090 |
| 10 | 1090 | 1365 | 1635 | 1910 | 2180 | 2455 | 2725 | 3000 | 3270 | 3545 | 3820 |
| 11 | 1320 | 1650 | 1980 | 2310 | 2640 | 2970 | 3300 | 3630 | 3960 | 4290 | 4620 |
| 12 | 1570 | 1965 | 2355 | 2750 | 3140 | 3535 | 3925 | 4320 | 4710 | 5105 | 5500 |
| 13 | 1850 | 2300 | 2770 | 3225 | 3685 | 4150 | 4610 | 5070 | 5530 | 5990 | 6450 |
| 14 | 2140 | 2675 | 3205 | 3740 | 4275 | 4810 | 5345 | 5880 | 6415 | 6950 | 7485 |
| 15 | 2450 | 3070 | 3680 | 4300 | 4900 | 5520 | 6130 | 6750 | 7360 | 7970 | 8590 |
| 16 | 2790 | 3490 | 4190 | 4885 | 5585 | 6285 | 6980 | 7680 | 8380 | 9075 | 9775 |
| 17 | 3150 | 3940 | 4730 | 5515 | 6300 | 7090 | 7880 | 8670 | 9450 | 10240 | 11030 |
| 18 | 3535 | 4420 | 5300 | 6185 | 7070 | 7950 | 8835 | 9720 | 10600 | 11485 | 12370 |
| 20 | 4365 | 5455 | 6545 | 7635 | 8725 | 9815 | 10910 | 12000 | 13090 | 14180 | 15270 |
| 22 | 5280 | 6600 | 7920 | 9240 | 10560 | 11880 | 13200 | 14520 | 15840 | 17160 | 18480 |
| 24 | 6285 | 7855 | 9425 | 10995 | 12656 | 14135 | 15710 | 17280 | 18850 | 20420 | 21995 |
| 26 | 7370 | 9210 | 11055 | 12900 | 14740 | 16580 | 18420 | 20270 | 22110 | 23950 | 25800 |
| 28 | 8550 | 10685 | 12820 | 14960 | 17100 | 19230 | 21310 | 23500 | 25650 | 27780 | 29920 |
| 30 | 9800 | 12260 | 14700 | 17170 | 19625 | 22080 | 24530 | 26990 | 29440 | 31890 | 34350 |
| 32 | 11160 | 13950 | 16750 | 19541 | 22330 | 25120 | 27910 | 30700 | 33490 | 36280 | 39070 |
| 34 | 12600 | 15755 | 18905 | 22055 | 25210 | 28360 | 31510 | 34660 | 37810 | 40965 | 44115 |
| 36 | 14130 | 17665 | 21195 | 24730 | 28260 | 31800 | 35325 | 38860 | 42390 | 45925 | 49455 |
| 38 | 15745 | 19680 | 23615 | 27550 | 31490 | 35425 | 39360 | 43295 | 47230 | 51170 | 55100 |
| 40 | 17445 | 21800 | 26170 | 30530 | 34890 | 39250 | 43610 | 47975 | 52330 | 56700 | 61055 |

Sizing Elbows & Special Components

SIZING ELBOWS

The catalog lists the standard sizes and the standard gauges. However, Easy Duct also makes elbows in long radius and in heavier gauges. The elbows can be made in segments or can be made with smooth wall. Pricing for the various sizes and gauges should be obtained by calling Easy Duct.

SPECIAL COMPONENTS

As with the elbows, Easy Duct is able to provide special hoods or special designed pieces for almost any dust collection application. To obtain help in design or pricing, call Easy Duct.

ADAPTING TO EXISTING SYSTEMS

There will be instances where the customer will desire to apply “EASY DUCT” duct to an existing ducting system. Easy Duct makes adapters for this purpose. We can provide these in flange to “EASY DUCT” or through simply supplying “EASY DUCT” adapters that can be attached to the end of existing spiral duct so that “EASY DUCT” can be coupled to the duct.

CAULKING USED ON SEAMS OF COMPONENTS

- A) Scotch Seal (R) 2084 metal sealant.
- B) 3M ID #62-2084-2631-2
- C) Ingredients: Acetone, acrylonitrile, kaolin, phenolic resin, rosin ester salicylic acid, aluminum pigment zinc oxide, amorphous silica
- D) Paint used on Welds
Krylon Industrial Tough Coat, Acrylic Enamel # 1760 Aluminum

PAINTING GALVANIZED COMPONENTS


- Step 1. Wash down all components with an industrial de-greaser, insuring that no oils or residues are left behind.
- Step 2. Apply an epoxy primer in a light coating.
- Step 3. For a final coat, apply an acrylic water base paint. (Example: Glidden Lifemaster)
Note: Galvaneal can be provided at additional 10% cost.

Rubber Flex Hose

Why Buy RFH Hose:

- Wider Temperature Range
- Superior Chemical Resistance
- No Cement
- Better Abrasion Resistance
- Better Looking Product
- Better UV, Moisture and Weathering Resistance
- Outstanding Flex Resistance
- Versatility
- Air Tight
- Will Not Set to The Shape of the Box When Packed

RFH



General Purpose Part # 3280-XX00

Specifications

Temperature Range: -60 F. to 275 F.
(intermittent to 300 F.)


Standard Color: Black

Standard Length: 5' increments with 5' min

Sizes: 1", 1.5", 2", 2.5", 3", 3.5", 4", 5", 5.5", 6",
7", 8", 9", 10", 11", 12", 13", 14", 16", 18", 20", 24"

Description: Constructed of thermoplastic rubber and reinforced with wire helix, RFH is the most versatile general-purpose hose available today. No cements, solvents, chemicals, adhesives or glues are used in the manufacturing process of RFH. RFH has superior chemical resistance and is capable of handling fumes as tough as Methyl Ethyl Ketone, sulfuric acid or toluene. RFH is manufactured in standard black. Please consult us for minimums and prices for other lengths and on non-standard diameters, including metric sizes from 51mm to 500mm.

CVD



General Purpose, Economical Part # 3280-XX00-700000

Specifications:

Temperature Range: -20 F to 180 F


Standard Color: Clear

Standard Length: 5' increments with 5' min

Sizes: 1", 1.5", 2", 2.5", 3", 3.5", 4", 5", 5.5", 6", 7", 8", 10", 12",
14, 16", 18"

Description: Constructed of polyvinylchloride and reinforced with steel wire, CVD is an excellent choice for many industrial and food service applications. CVD is an economical alternative to most ducts and sacrifices nothing in performance. CVD is an excellent choice for applications involving fume removal dust collection, ventilation and other more rigorous industrial requirements. Material used in clear hose is FDA acceptable.

UFD



Tough Or Severe Service Applications Custom Part Can Be Ordered And Shipped Direct.

Specifications:

Temperature Range: -65 F to 200 F

Standard Color: Clear or Black


Standard Length: 5' increments with 5' min

Sizes: 1", 1.5", 2", 2.5", 3", 4" 5" 6" 7" 8" 10" 12", 14", 16", 18"

Description: Constructed of thermoplastic urethane and reinforced with a wire helix, UFD offers superior abrasion resistance. UFD is the answer for those who want a lightweight, flexible hose which can handle much abrasion. UFD can be used in numerous applications such as leaf loading, chip handling, dust collection, etc. The superior transparency of the clear UFD allows users to locate blockages. This hose is suitable for severe service applications including vacuum and high abrasion. Material used in clear hose is FDA acceptable.

Rigid & Ultra Flex Metal Hose

RIGID METAL FLEX HOSE



Part # 3281-XX00

| Inside Dia. (Inches) | Appox. Outside Dia. (Inches) | Min. CLR Bend Radius | Appox. Weight Per Foot (LBS) |
|----------------------|------------------------------|----------------------|------------------------------|
| 1 1/2 | 1 3/4 | 12.0 | 1.00 |
| 2 | 2 1/4 | 16.0 | 1.30 |
| 2 1/2 | 2 3/4 | 18.0 | 1.60 |
| 3 | 3 1/4 | 22.0 | 2.00 |
| 3 1/2 | 3 3/4 | 25.0 | 2.30 |
| 4 | 4 1/4 | 29.0 | 2.60 |
| 5 | 5 1/4 | 34.0 | 3.00 |

MEDIUM-HEAVY GALVANIZED OR STAINLESS

| Inside Dia. (Inches) | Appox. Outside Dia. (Inches) | Min. CLR Bend Radius | Appox. Weight Per Foot (LBS) |
|----------------------|------------------------------|----------------------|------------------------------|
| 6 | 6 1/4 | 44.0 | 3.60 |
| 7 | 7 1/4 | 50.0 | 4.20 |
| 8 | 8 1/4 | 56.0 | 4.70 |
| 9 | 9 1/4 | 61.0 | 5.30 |
| 10 | 10 1/4 | 65.0 | 5.90 |
| 12 | 12 1/4 | 76.0 | 7.00 |
| 14 | 14 1/4 | 106.0 | 8.10 |

.017- .020 Strip Thickness

ULTRA FLEX METAL HOSE

Part # 3283-XX00

| Inside Dia. (Inches) | Min. CLR Bend Radius | Appox. Weight Per Foot (LBS) |
|----------------------|----------------------|------------------------------|
| 3 | 21 | 2.15 |
| 4 | 30 | 2.65 |
| 5 | 35 | 2.95 |


Manufactured in sizes ranging from 3" dia thru 8" dia of stainless steel or galvanized. Some Applications would include Air Handling, and Dust Collection.

| Inside Dia. (Inches) | Min. CLR Bend Radius | Appox. Weight Per Foot (LBS) |
|----------------------|----------------------|------------------------------|
| 6 | 43 | 3.55 |
| 7 | 52 | 4.15 |
| 8 | 60 | 4.55 |

Square Lock: ID Tolerance: +1/4 " , - 0
Specification: 3"-6" manufactured out of .019 material
7"-8" manufactured out of .024 material

RIGID AND ULTRA FLEX STEEL HOSE CONFIGURATIONS


Steel Flex Hose With Raw Ends (Standard)




Steel Flex Hose With EASY DUCT Ends (Custom)



Steel Flex Hose With Flange Ends (Custom)




Steel Flex Hose With Raw Pipe Ends (Custom)



NOTE: When ordering steel hose, you have the option of having the hose fitted with several different style end fittings in any number of combinations. Raw hose is priced per foot, and sold only in 5 Ft. increments. Contact your sales rep for pricing on specific lengths and end fittings.

Bleed-In Valve

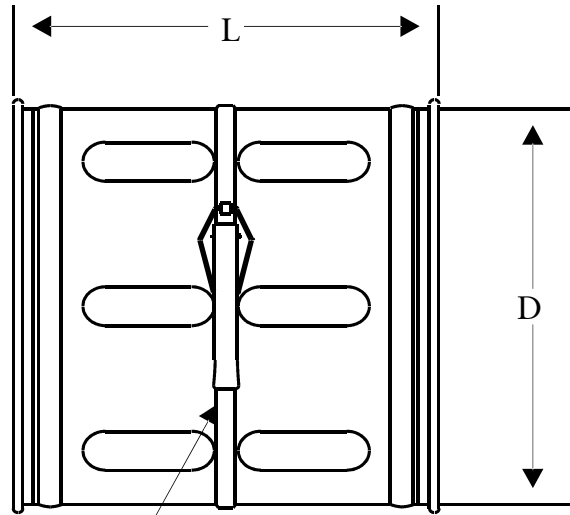

To Adjust, Loosen Clamp and Turn
Outer Sleeve To Get Proper Air-flow
Re-Clamp When Finished

| Diameter "D" | Length | No. Slots Per Row | Gauge |
|--------------|--------|-------------------|-------|
| 4" | 11" | 2 | 22 |
| 5" | 11" | 3 | 22 |
| 6" | 11" | 3 | 22 |
| 7" | 11" | 4 | 22 |
| 8" | 11" | 4 | 22 |
| 9" | 11" | 5 | 22 |
| 10" | 11" | 5 | 22 |
| 11" | 11" | 6 | 22 |
| 12" | 11" | 6 | 22 |

| Diameter "D" | Length | No. Slots Per Row | Gauge |
|--------------|--------|-------------------|-------|
| 13" | 11" | 6 | 20 |
| 14" | 11" | 7 | 20 |
| 15" | 11" | 6 | 20 |
| 16" | 11" | 8 | 20 |
| 17" | 11" | 9 | 20 |
| 20" | 11" | 10 | 20 |
| 22" | 11" | 11 | 20 |
| 24" | 11" | 11 | 20 |

DESCRIPTION:

A slotted movable band over slotted "EASY DUCT" duct, allowing for adjustment of airflow.

APPLICATIONS:

Used to adjust airflow to balance system by introducing ambient air.

AVAILABILITY:

Material: GALVANIZED or STAINLESS STEEL
 Sizes in inch: 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 20, 22, 24
 Part numbers: 3207-XX00 (where XX is the diameter)

Installing Tap-In or Cut-In

STEP 1:

Temporarily place the in-cut on the main trunk in the required position, and while holding in place, place hand inside of branch and trace the interior of the branch on trunk line where it needs to be cut out.

STEP 2:



Take down in-cut and drill a starter hole in the main trunk along the line traced from the branch. Then using metal snips or a reciprocating saw, cut out metal piece that has been traced. File or grind any sharp edges to insure efficient flow.

STEP 3:

Now use an industrial strength silicone sealant to seal between in-cut base and main trunk.



STEP 4:

Use small sheet metal screws or a banding type clamp material to secure in-cut to the main trunk line.

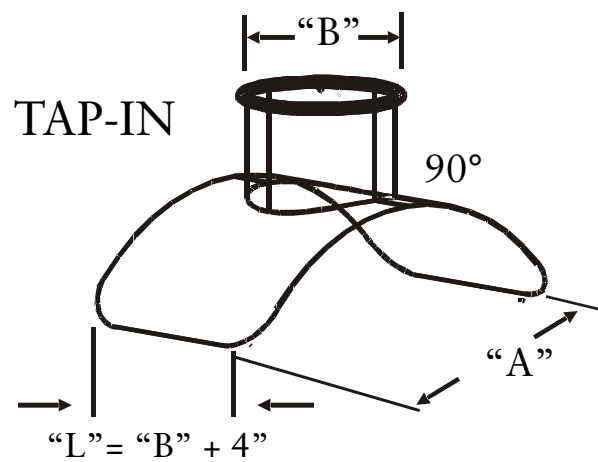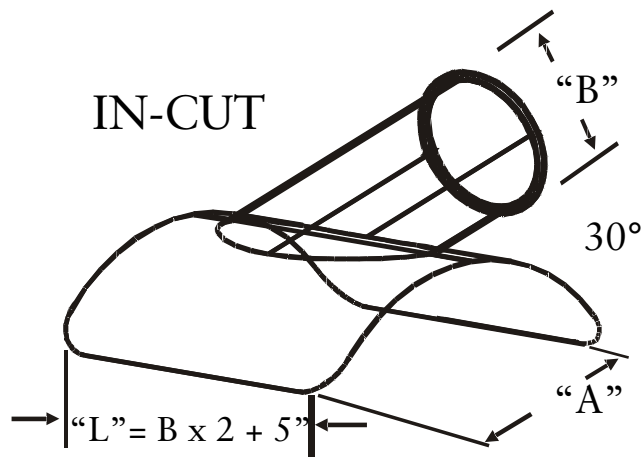

Automatic Blast Gate

AUTOMATIC BLAST GATE

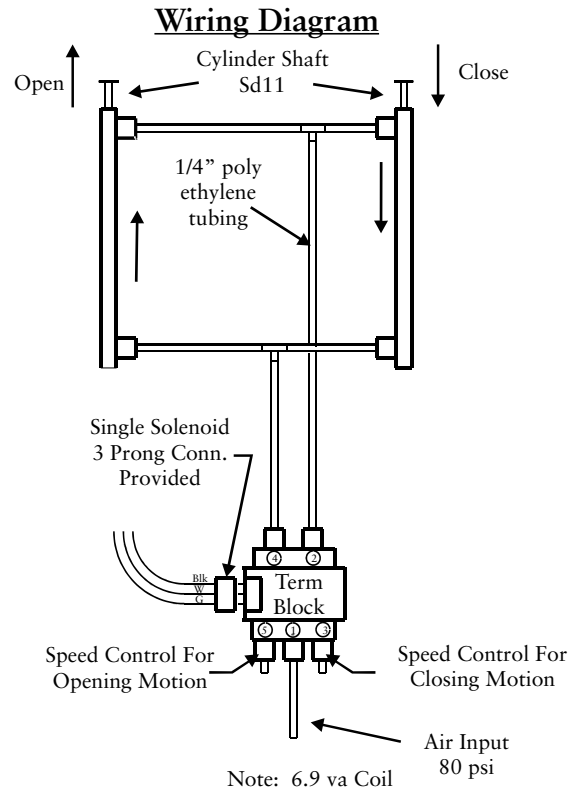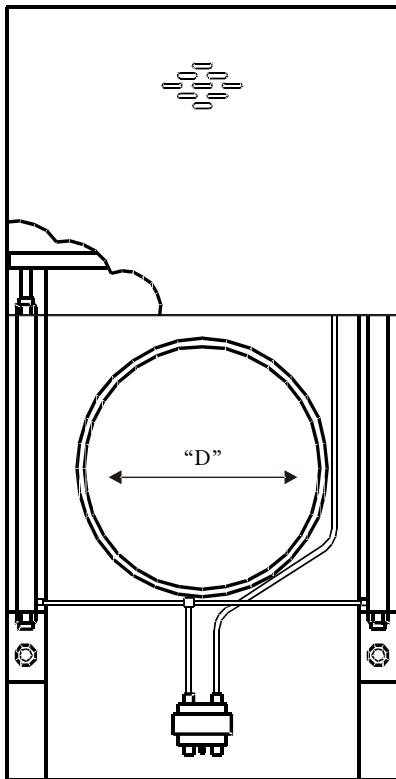

DESCRIPTION:

Automatic energy saving blast gates operated by double-acting compressed air cylinders. Cylinders are controlled by electrically-connecting solenoid to machines or remote switch. Gates are constructed with a special sealing device that reduces air loss and friction in operation.

APPLICATIONS:

Gates are used as energy-saving devices for industrial dust extraction where extraction is not always needed and where manual control needs to be eliminated.

AVAILABILITY:

Material: GALVANIZED or STAINLESS STEEL

Sizes in inch: 4, 5, 6, 7, 8, 9, 10, 11, 12, 14, 16, 18, 20, 22, 24, 26


One cylinder Two cylinder

Part numbers: 3245-XX00 (where XX is the diameter)

Special: Customer needs 120 Volt and 50 psi minimum air pressure. 240, 24 and 12 volt AC as well as 24 and 12 volt DC models are available upon request.

Manual Blast Gate

MANUAL BLAST GATE

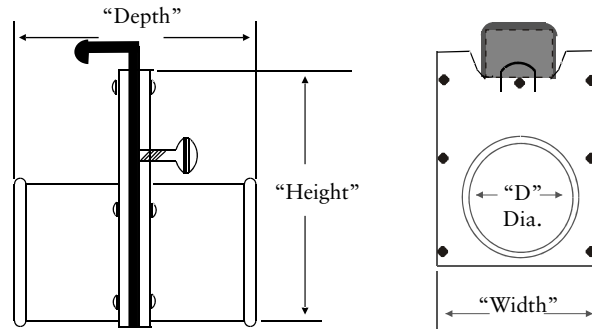


Manually operated, cast aluminum body with standard Easy Duct connection unless otherwise specified.

| DIA. (D) INCHES | PART NO. | WIDTH | HEIGHT | DEPTH | COLLAR HEIGHT | WT LBS. |
|--------------------|----------|-------|--------|--------|------------------|------------|
| 4" | 3240-04 | 5.25 | 7.00 | 5.750 | 2.650 | 2.0 |
| 5" | 3240-05 | 6.12 | 6.25 | 5.750 | 2.550 | 3.0 |
| 6" | 3240-06 | 7.00 | 10.00 | 5.750 | 2.500 | 3.5 |
| 7" | 3240-07 | 8.00 | 11.12 | 5.375 | 2.375 | 4.5 |
| 8" | 3240-08 | 9.37 | 12.00 | 5.375 | 2.375 | 5.5 |
| 9" | 3240-09 | 11.00 | 13.25 | 5.500 | 2.370 | 7.0 |
| 10" | 3240-10 | 11.37 | 14.37 | 5.500 | 2.370 | 8.0 |
| 11" | 3240-11 | 13.50 | 16.25 | 5.000 | 2.250 | 12.0 |
| 12" | 3240-12 | 13.50 | 16.25 | 5.000 | 2.250 | 12.0 |
| 14" | 3240-14 | 15.75 | 17.87 | 5.000 | 2.250 | 16.0 |
| 16" | 3240-16 | 18.00 | 28.50 | 11.000 | 2.250 | 20.0 |
| 18" | 3240-18 | 20.80 | 32.75 | 11.000 | 5.250 | 37.0 |
| 20" | 3240-20 | 22.25 | 34.00 | 11.000 | 5.125 | 45.0 |
| 22" | 3240-22 | 24.25 | 33.50 | 11.000 | 5.125 | 48.0 |
| 24" | - | - | - | - | - | CALL |

Energy Saving Blast Gate


ENERGY SAVING BLAST GATE

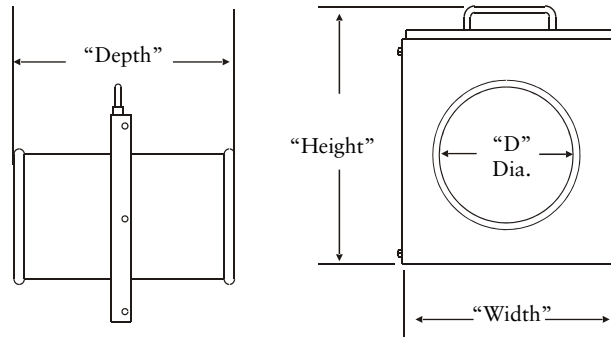

Manually operated, energy saving blast gates. These compact and easy to operate gates are constructed of galvanized metal with a special sealing device that reduces air loss and friction in operation.

| DIA. (D) INCHES | PART NO. | WIDTH | HEIGHT | DEPTH | COLLAR HEIGHT | WT LBS. |
|--------------------|----------|-------|--------|-------|------------------|------------|
| 4" | 3241-04 | 5.25 | 7.00 | 5.75 | 2.65 | 2.0 |
| 5" | 3241-05 | 6.12 | 6.25 | 5.75 | 2.55 | 3.0 |
| 6" | 3241-06 | 7.00 | 10.00 | 5.75 | 2.50 | 3.5 |
| 7" | 3241-07 | 8.00 | 11.12 | 5.375 | 2.375 | 4.5 |
| 8" | 3241-08 | 9.37 | 12.00 | 5.375 | 2.375 | 5.5 |
| 9" | 3241-09 | 11.00 | 13.25 | 5.50 | 2.37 | 7.0 |
| 10" | 3241-10 | 11.37 | 14.37 | 5.50 | 2.37 | 8.0 |
| 12" | 3241-12 | 13.50 | 16.25 | 5.00 | 2.25 | 12.0 |
| 14" | 3241-14 | 15.75 | 17.87 | 5.00 | 2.25 | 16.0 |
| 16" | 3241-16 | 18.00 | 28.50 | 11.00 | 5.25 | 20.0 |

Diverter Valve

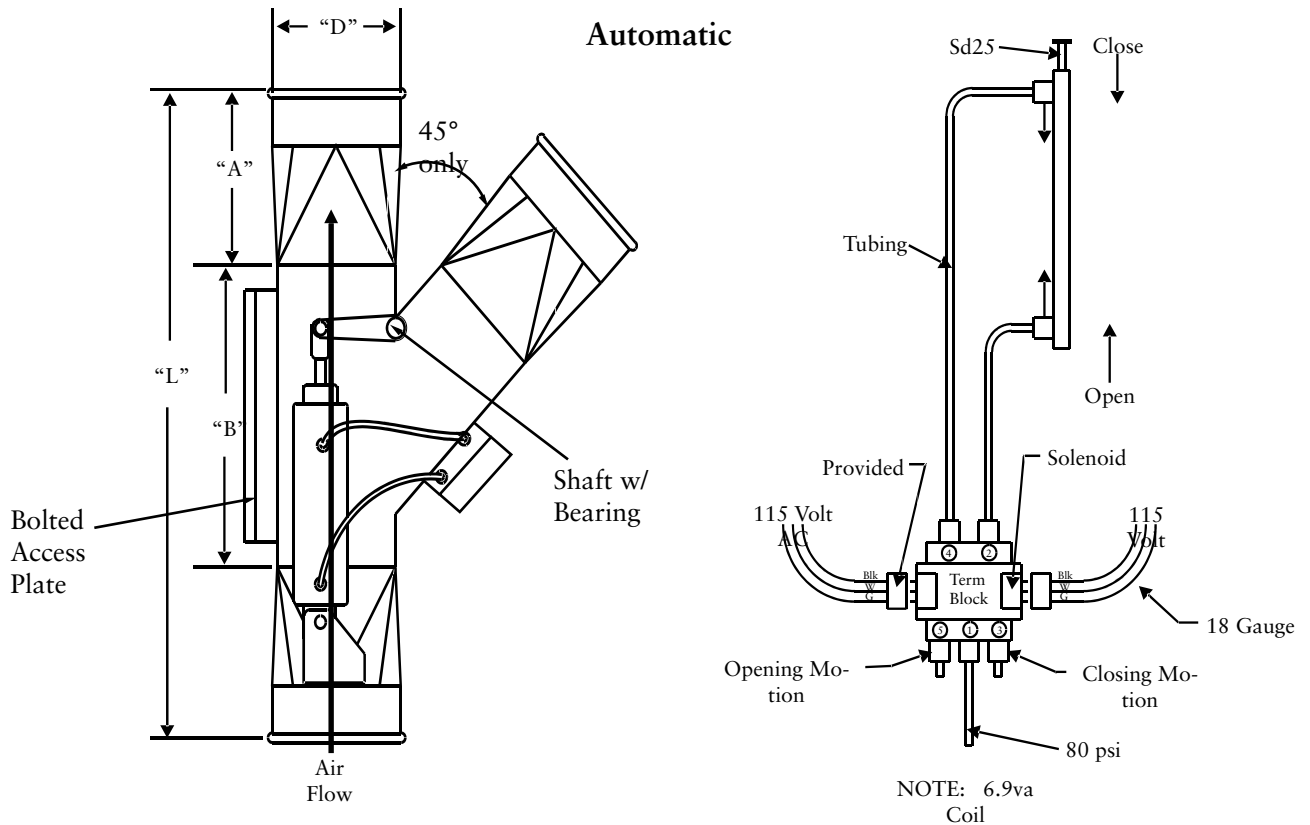

DESCRIPTION:

Highly efficient, economical method of diverting flow of material or air. Designed with Q-F or flanged, manual, or air operated.

APPLICATIONS:


Diverter valves are used for diverting the air to one of two possible directions at a time. Divert the flow of material or air.

AVAILABILITY:

- Material: BLACK METAL or STAINLESS STEEL 3/16" thick
- Sizes in inch: 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 20, 22, 24
Larger sizes available upon request.
- Please NOTE: 45 lateral angle only
- Part numbers: 3235-XX00 for manual (where XX is the diameter)
3236-XX00 for automatic, PLUS read "Special".
- Special: Customer needs 120Volt and 75 psi minimum air pressure.
240, 24 and 12 volt AC as well as 24 and 12 volt DC models are available upon request.

Wall & Roof Flashing

WALL FLASHING

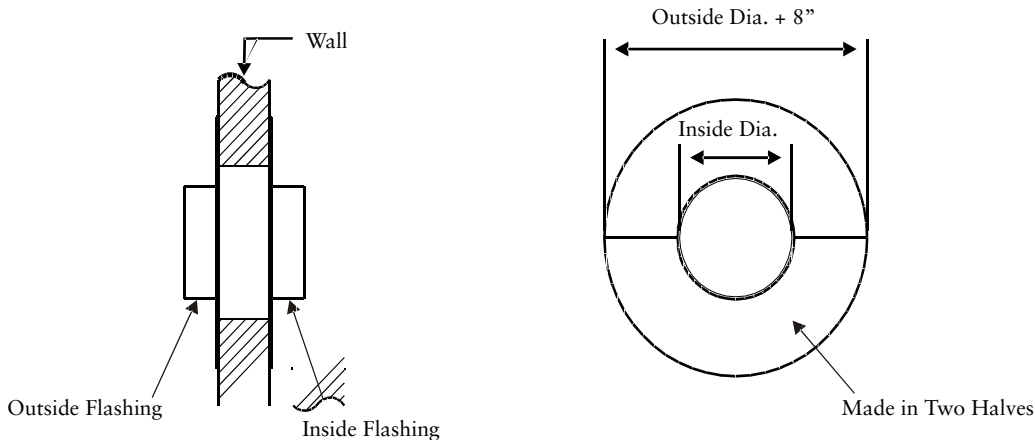


DESCRIPTION:

Provides weather protection for Wall penetration. Ordering "one Flashing" provides you with both 1 inside and 1 outside flashing (4 halves).

AVAILABILITY:

Material: GALVANIZED or STAINLESS STEEL
 Sizes in inch: 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 20, 22, 24, 26, 28, 30, 32, 34, 36, 38, 40

ROOF FLASHING

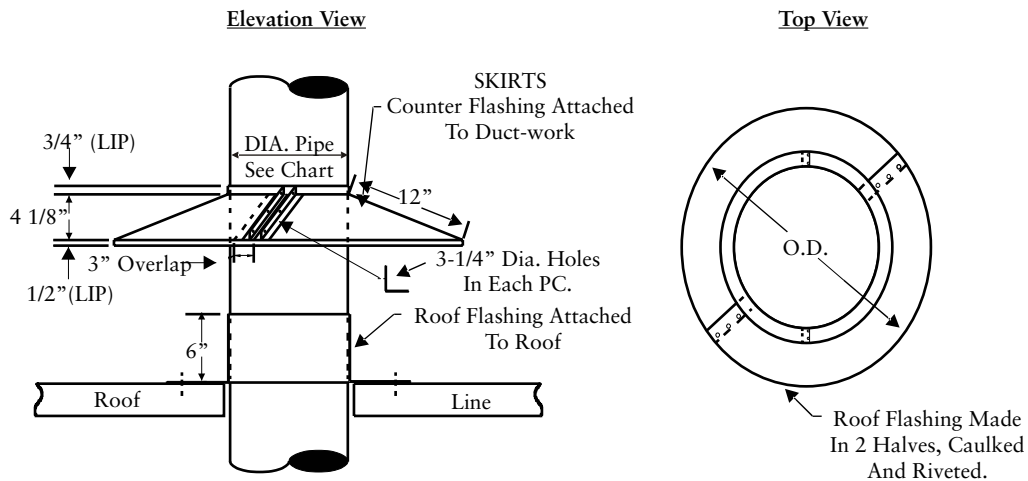

DESCRIPTION:

Provides weather protection for roof penetration.

AVAILABILITY:


Material: GALVANIZED or STAINLESS STEEL
 Sizes in inch: 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 20, 22, 24, 26, 28, 30, 32, 34, 36, 38, 40

NOTE: Please specify Wall or Roof Flashing

| Quantity | Dia. Of Pipe New Laser Weld Seam | # of Sets |
|----------|----------------------------------|-----------|
| | | |
| | | |
| | | |

Wall Mounting Brace


TYPICAL WALL MOUNTING BRACE

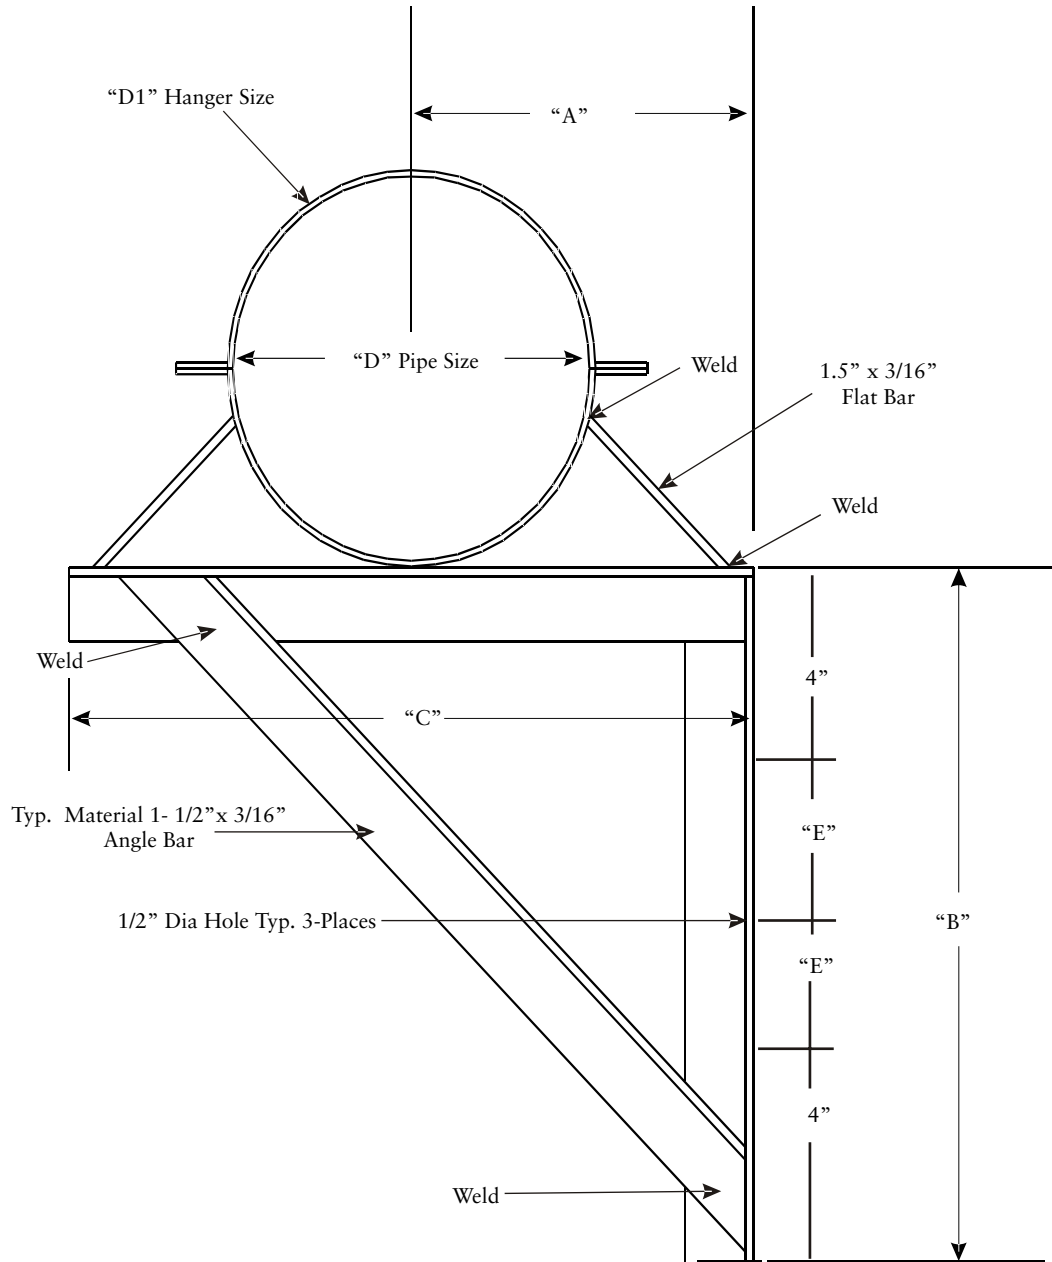

| QTY | "A" | "B" | "C" | "D1" | "D" | "E" |
|-----|-----|-----|-----|------|-----|-----|
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |
| | | | | | | |

Ceiling Hanging Method

TYPICAL CEILING HANGING METHOD

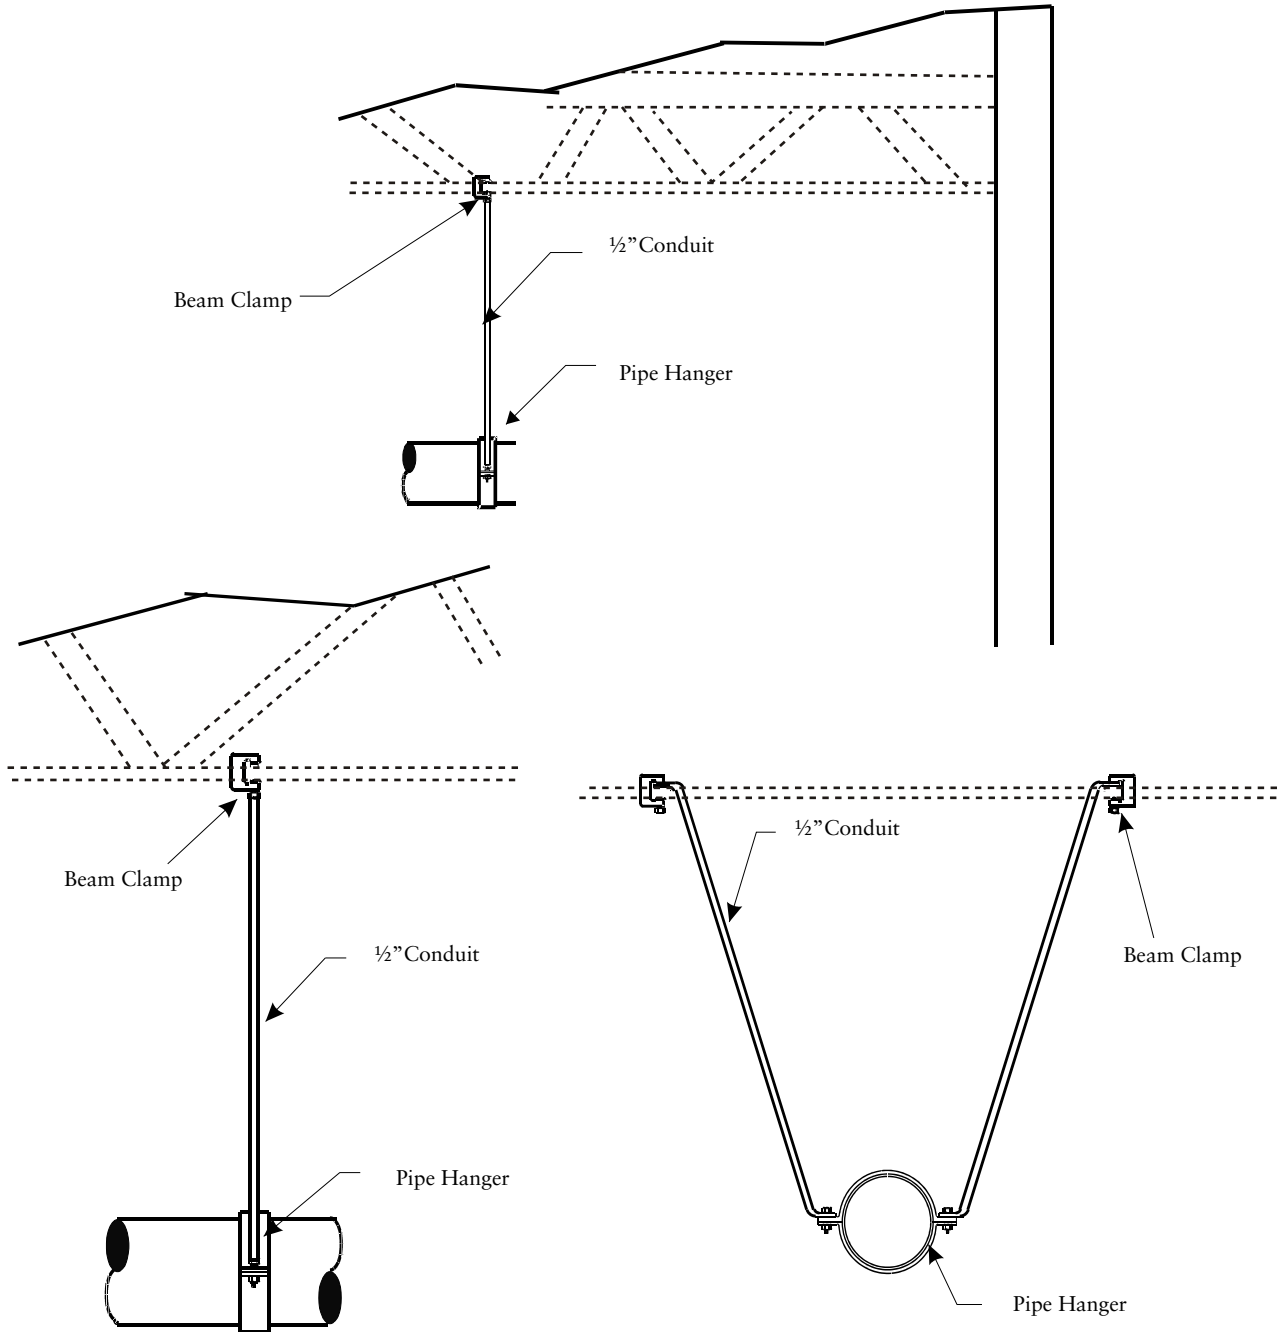

NOTE:


1. Above 10" should be supported approximately every 15' to 20' from roof joist.
2. Below 10" should be supported approximately every 12' to 15' from roof joist.

Pipe Stand with Hanger Bracket

Note: This special type of pipe stand and hanger are used in certain situations, such as at trade shows and tight installations.

Special Pipe Stand Hanger Bracket

Material: 1 1/4" x 3/16" Blk Flat Bar Paint to Match Grey Stand

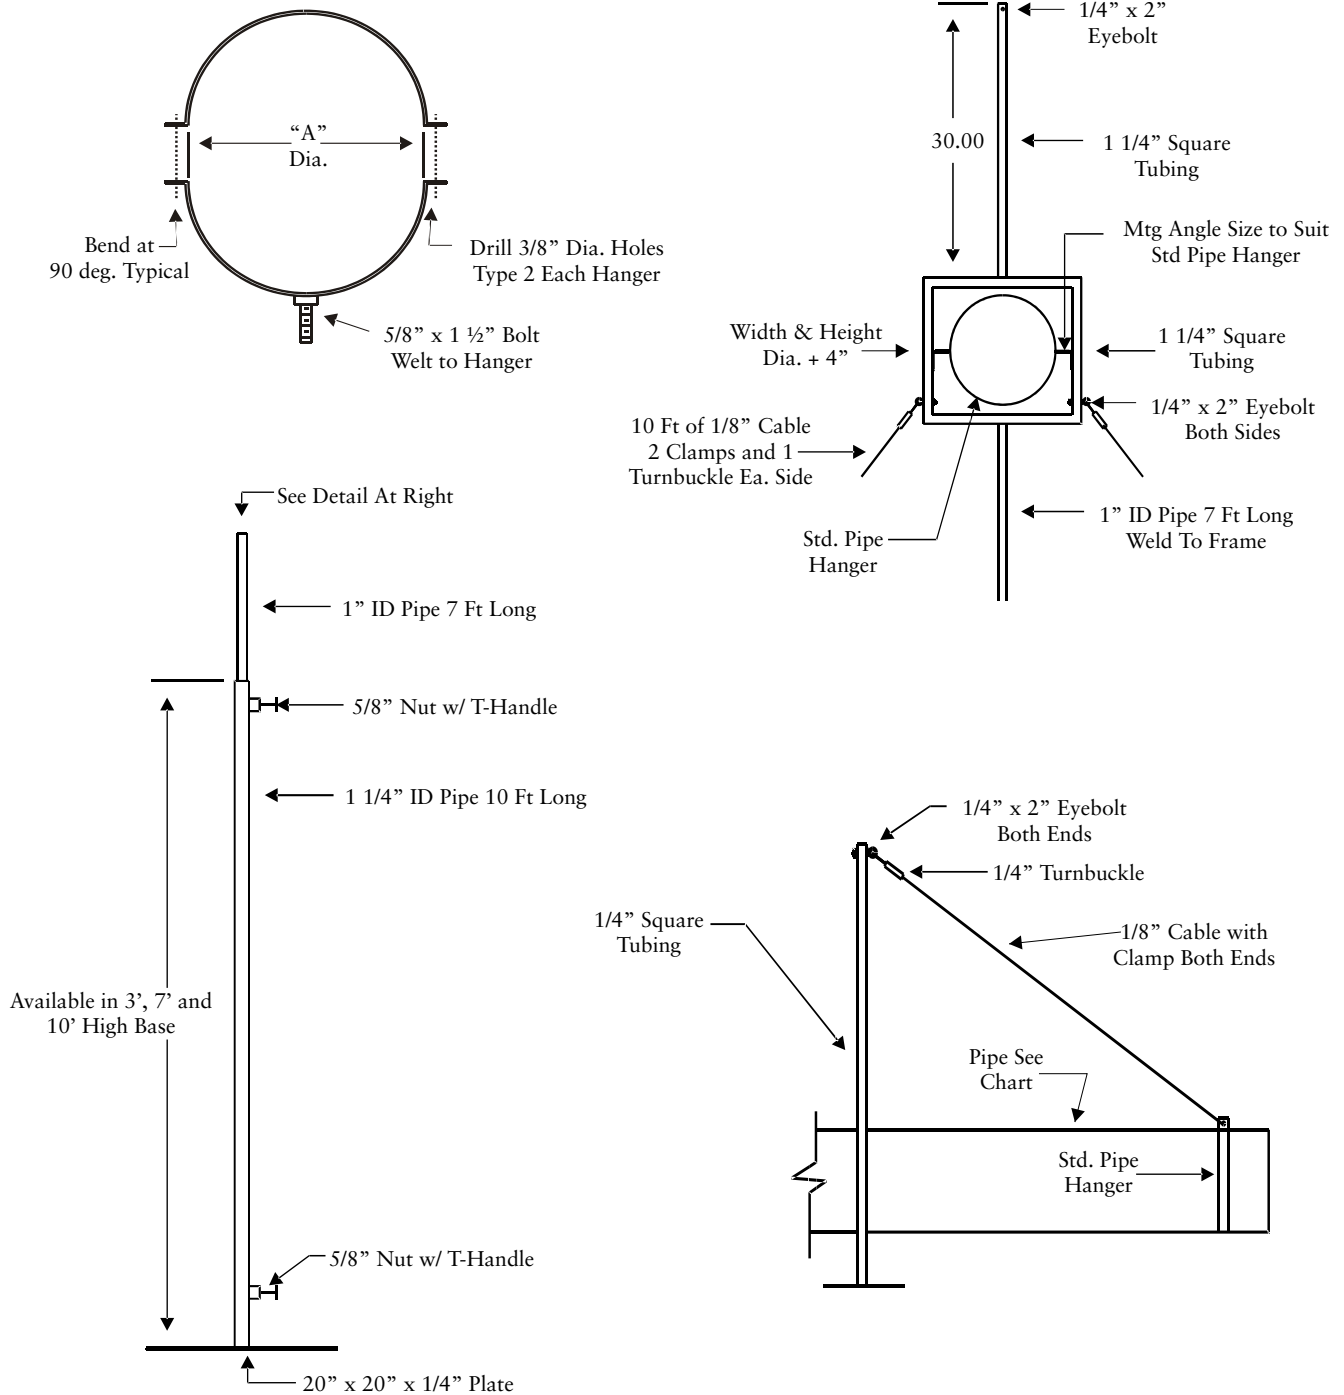

Gripple Hanger System


GRIPPLE HANG-FAST

Gripple Hang-Fast is a complete solution for hanging mechanical and electrical services. It comes as a ready-to-use suspension kit, with load ratings from 35 kg to 325 kg. The comprehensive range ensures that installation times are minimized and high productivity is achieved on site.

The principal element of all Gripple Hang-Fast assemblies is the Gripple Hang-Fast Grip, which is not only used to terminate the rope but is also the means by which object height can be adjusted.

Gripple Hang-Fast Sizes & Working Load Limits ...

| ITEM # | LENGTH | WEIGHT | AVAILABILITY |
|------------------|--------|---------|--------------|
| 3266-1500-022LBS | 15' | 22 LBS | IN STOCK |
| 3266-1500-100LBS | 15' | 100 LBS | IN STOCK |
| 3266-1500-200LBS | 15' | 200 LBS | IN STOCK |
| 3266-1500-495LBS | 15' | 495 LBS | IN STOCK |
| 3266-1500-715LBS | 15' | 715 LBS | IN STOCK |

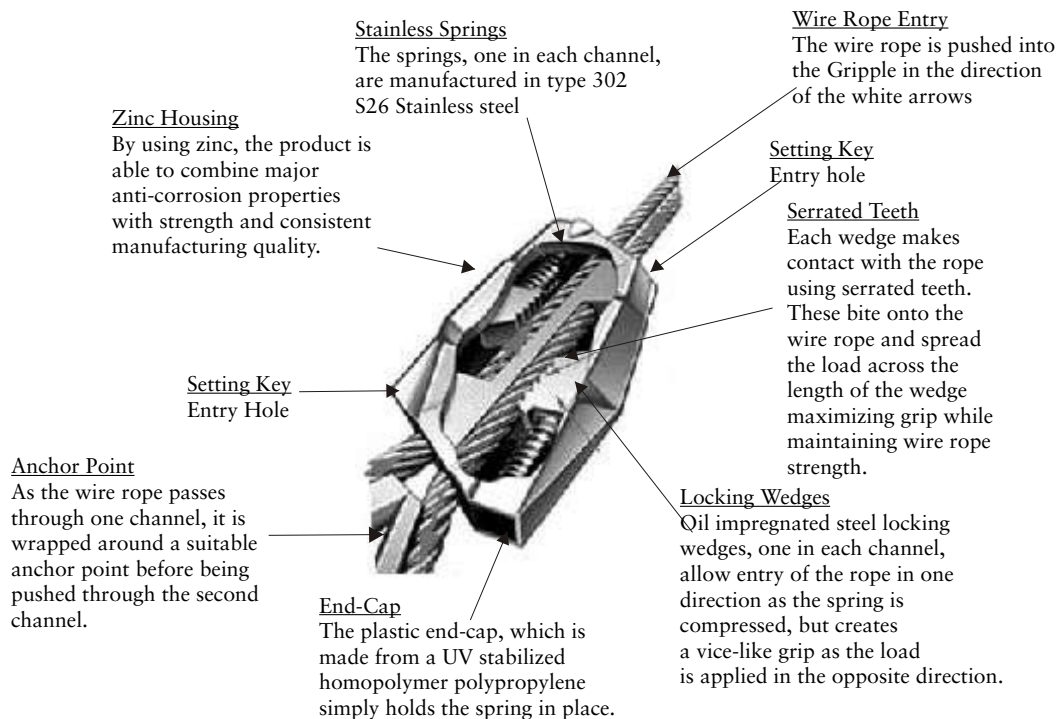

No-Loss Stack-Head In-Line Sound Silencer

NO-LOSS STACK-HEAD

DESCRIPTION:


Used when exhausting from fans or stacks through the roof.

AVAILABILITY:


Material: GALVANIZED or STAINLESS STEEL
 Sizes in inch: 3, 4, 5, 6, 7, 8, 9, 10, 11,12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 26, 28, 30, 32, 34, 36, 38, 40
 Part numbers: 3204-XX00 (where XX is the diameter)

APPLICATIONS:

Eliminates back pressure on the fan while providing weather protection.

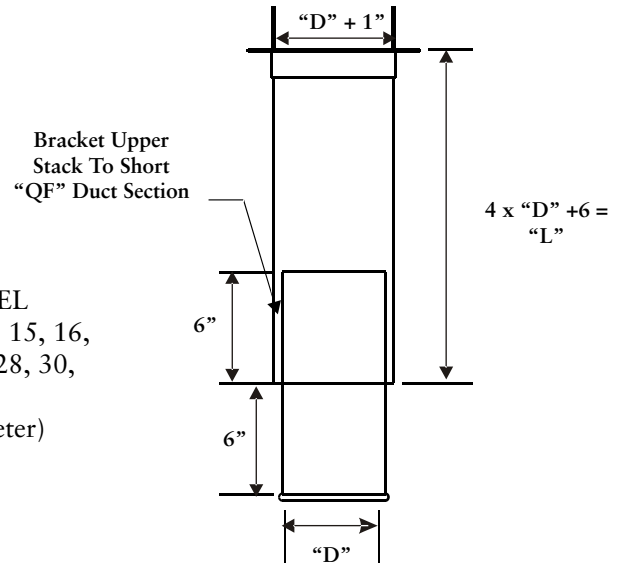

INLINE SILENCER

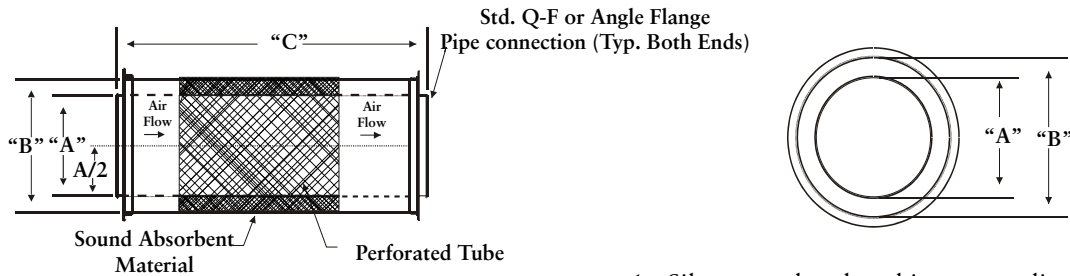

| "A" | "B" | PART NO. | ENDS | LENGTH (C) | GAUGE HOUSING | WEIGHT (GALV) |
|-----|-----|-----------|--------|------------|---------------|---------------|
| 3" | 12" | 3106-0300 | QF | 28" | 16 | 10.00 |
| 4" | 12" | 3106-0400 | QF | 28" | 16 | 21.00 |
| 5" | 13" | 3106-0500 | QF | 28" | 16 | 35.00 |
| 6" | 14" | 3106-0600 | QF | 30" | 16 | 43.00 |
| 7" | 15" | 3106-0700 | QF | 30" | 16 | 54.00 |
| 8" | 16" | 3106-0800 | QF | 35" | 16 | 65.00 |
| 9" | 17" | 3106-0900 | QF | 40" | 16 | 76.00 |
| 10" | 18" | 3106-1000 | QF | 48" | 16 | 89.00 |
| 12" | 20" | 3106-1200 | QF | 54" | 16 | 104.00 |
| 14" | 22" | 3106-1400 | QF | 60" | 16 | 122.00 |
| 16" | 24" | 3106-1600 | QF | 64" | 16 | 176.00 |
| 18" | 26" | 3106-1800 | QF | 68" | 16 | 225.00 |
| 20" | 28" | 3106-2000 | QF | 72" | 16 | 265.00 |
| 22" | 30" | 3106-2200 | QF | 76" | 16 | 310.00 |
| 24" | 32" | 3106-2400 | QF | 80" | 16 | 406.00 |
| 26" | 34" | 3106-2600 | FLANGE | 80" | 16 | 546.00 |
| 28" | 36" | 3106-2800 | FLANGE | 80" | 16 | 600.00 |
| 30" | 38" | 3106-3000 | FLANGE | 80" | 16 | 678.00 |
| 32" | 40" | 3106-3200 | FLANGE | 80" | 16 | 700.00 |
| 34" | 42" | 3106-3400 | FLANGE | 80" | 16 | 770.00 |
| 36" | 44" | 3106-3600 | FLANGE | 80" | 16 | 897.00 |
| 38" | 46" | 3106-3800 | FLANGE | 80" | 16 | 974.00 |
| 40" | 48" | 3106-4000 | FLANGE | 80" | 16 | 1,118.00 |

1. Silencer to be placed in process line down stream of fan or cyclone collector.
2. Silencer housing constructed of 16 gauge galvanized metal.
3. Silencer should be properly supported in process line.
4. NORDFAB reserves the right to modify the design of the silencer without notice.
5. Efficiencies of Silencer have not been tested, nor are there any guarantees of sound level attenuation.
6. Silencer made in two sections for 16" & larger diameters.

Labor Guidelines

What to be Aware of When Ordering

RULE OF THUMB LABOR GUIDELINES

- A) **Long straight runs and trunk-lines**
- “EASY DUCT” duct = 6 to 10 man hours per 100’
 - Flanged duct = 20 man hours per 100’
- B) **Machine Connections**
- Machine with 1 or 2 ports = 1.5 to 3 man hours per port.
 - Machines with 3 or more ports = 4 man hours per port.

A+B = TOTAL MAN HOURS
OR
QUICK METHOD

(TOTAL # OF PORTS) x 3 HOURS EACH = “X”
“X” x 2 = DUCTING SYSTEM TOTAL MAN HOURS

NOTE: The above methods should be used for comparison and budgetary purposes only!! By no means should they be used to confirm a job installation. It should be the sales person’s responsibility to analyze each individual job and make his/her own judgement.

THINGS TO BE AWARE OF WHEN ORDERING “EASY DUCT”

1. Order one clamp per “EASY DUCT” component.
 - 1 - duct = 1 clamp
 - 2 - elbows = 2 clamps
2. Specify dimensional information to speed up process:
 - Transitions A,B,D,L,X, Y and flange style
 - Branches A x B x C, or A x B x D, or A x B x C x D
 - Tap-In or In-cuts A, B
 - Reducer All diameters and end style

THERE IS NO SUCH THING AS TOO MUCH INFORMATION !

3. Look for 60 degree elbows to compliment branch orders. This is typical application since the two components will create a perpendicular run to the trunk line.
4. Ask for flange styles, hole patterns, ID, OD, when applicable. Typical components requiring flanges will be parts that connect to filters, fans or other types of equipment.

High-temp Fume Or Exhaust Applications

HIGH-TEMP FUME OR EXHAUST APPLICATIONS

GALVANIZED

Ducting will accommodate systems 0 degrees to 500 degrees F. with little or no breakdown of the zinc coating. Zinc melting point is 740 degrees F.

304 SS

Ducting will accommodate systems 500 degrees F. to 1100 degrees F. with no problems. At temperatures above 800 degrees, a small amount of “bluing” may occur.

CLAMP GASKETING ALTERNATIVES

1. NITRILE GASKET-STANDARD

Service temperature: -104 deg to +158 deg with an intermittent max temp of +194 deg.

- Standard seal installed in clamp
- The standard specifications meet ASTM D 1056.
- 3/8” gasket for 4”,5”,6”
- 1/2 ” gasket for 7” and larger

2. INERTECH PTFE GASKET TAPE

- Service temperature -450 DEG F. to 600 DEG F
- FDA suitable for use in food and pharmaceutical industries
- Not degraded by any common chemicals [0-14 PH range]
- Non-contaminating and non-aging
- 3/8” gasket for 4”,5”,6”
- 1/2” gasket for 7” and larger

TEMPERATURE RATINGS

1. Black rubber O-Ring material

Service temperature:

- -40 DEG F. to 250 DEG F.
- 70 Duro-meter hardness

2. Red rubber silicon O-Ring material

Service temperature: -100 DEG F. TO 500 DEG F.

- FDA suitable for use in food and pharmaceutical industries
- Specification: ZZ-R-765 Class 2A and 2B Grade 70 AMS-3304E and 3304F and 3303G

3. Diverter gasket 200 DEG F.

4. (RFH) rubber hose 275 DEG F.

5. UHMW seals in blast gates 180 DEG F.

6. Teflon seals 300 DEG F.

7. Galvanized ducting 500 DEG F.

8. Stainless steel ducting 800 DEG F.


9. RTV high temperature caulk 500 DEG F.

10. Standard caulk up to 250 DEG F.


NOTE: For temperatures 250 degrees F. to 500 degrees F. please request RTV High temp silicone caulk on components. There will be a 10% extra charge.

Wet System Installation


TYPICAL DROP FOR WET SYSTEMS

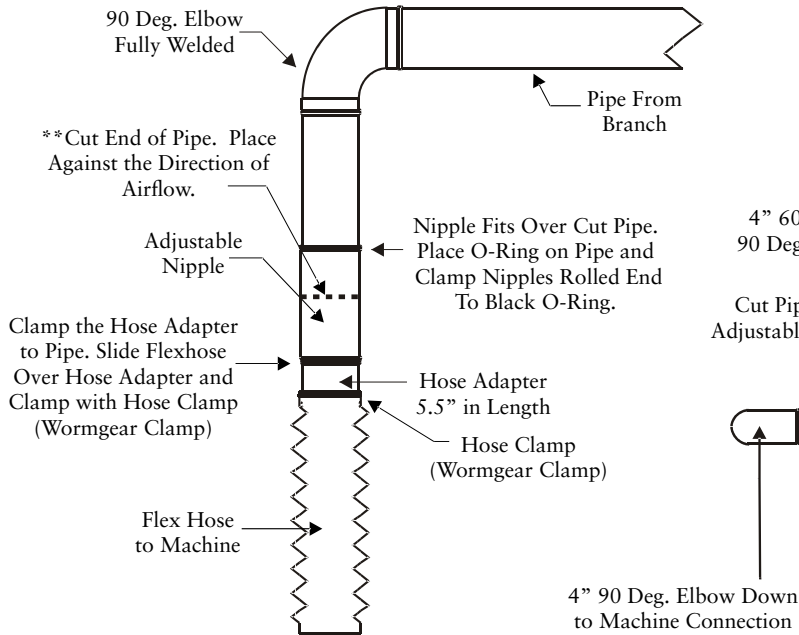

PLAN VIEW

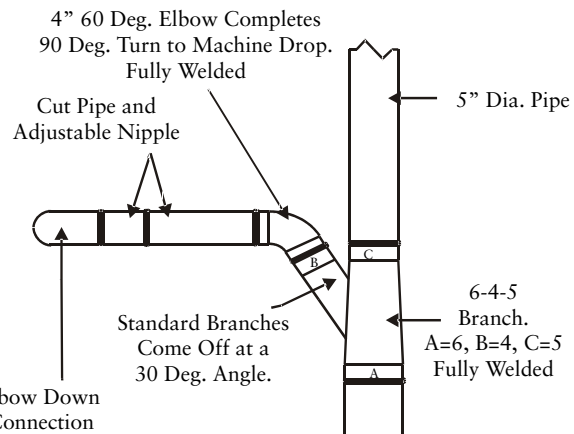


ELEVATION VIEW

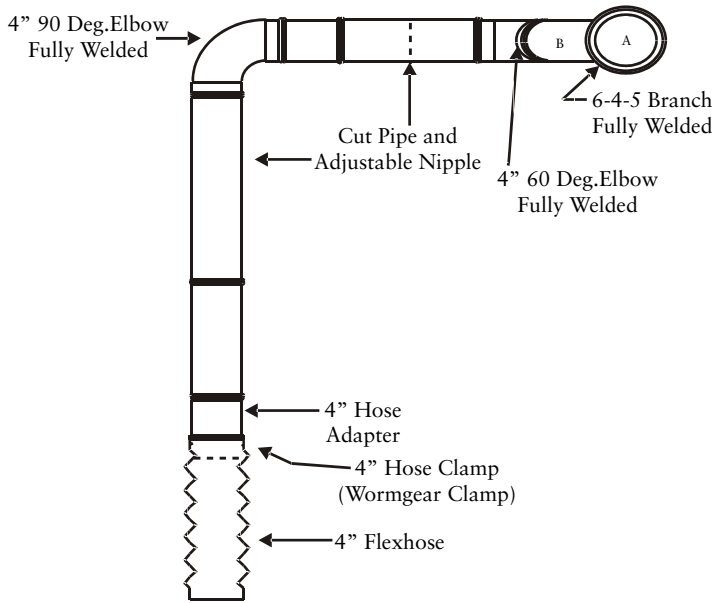

NOTE:
Blast gates are not commonly used for wet systems. Use butterfly valves for flow control.
***Use EASY DUCT clamps & dual gasketing


NOTE:
**Use EASY DUCT clamps & dual gasketing

HARD DUCT TO MACHINE

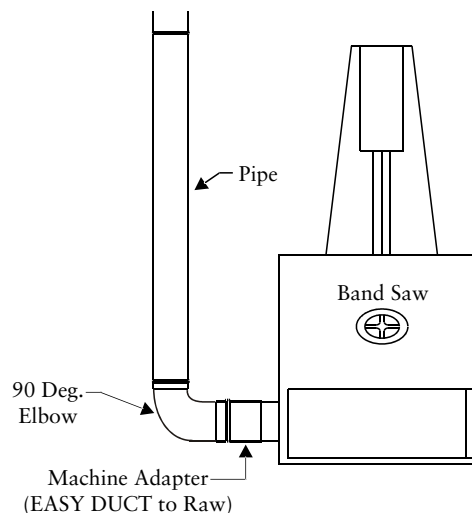


Dry System Installation


TYPICAL DROP FOR DRY SYSTEMS

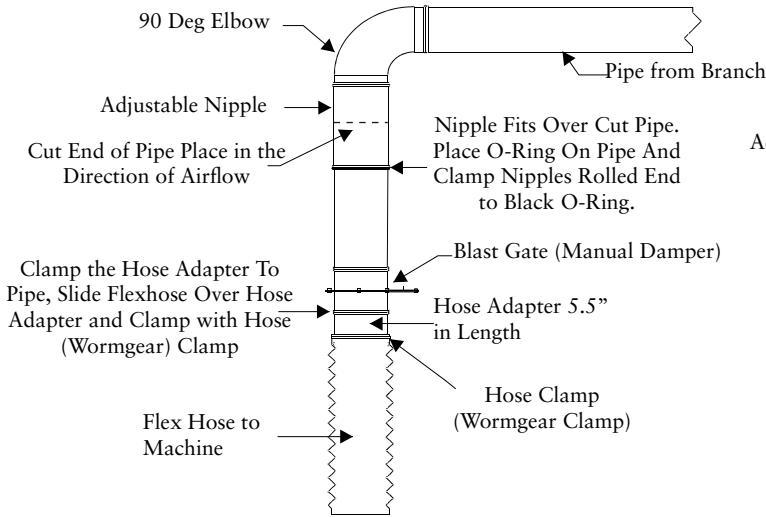


PLAN VIEW

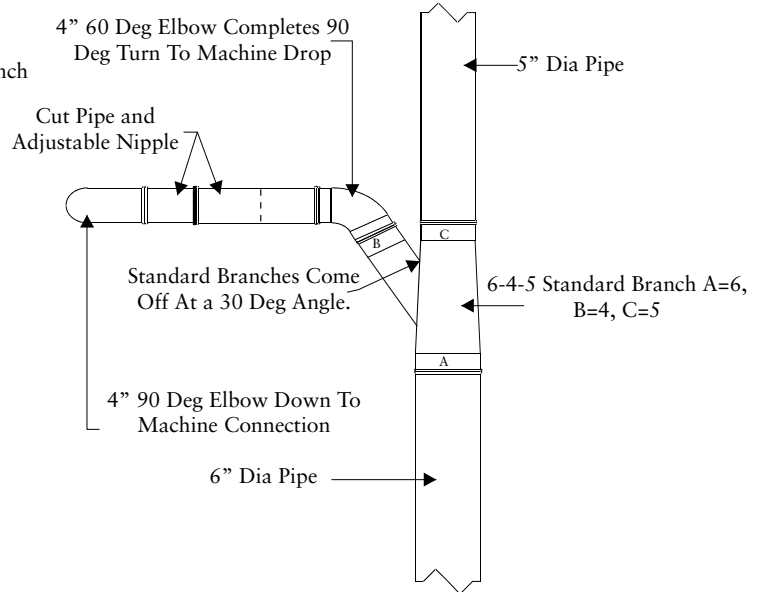


ELEVATION VIEW

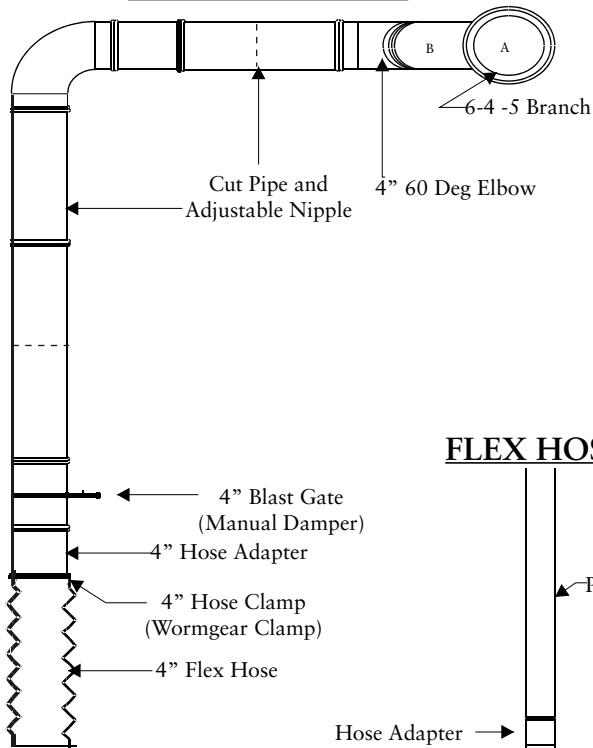

HARD DUCT TO MACHINE


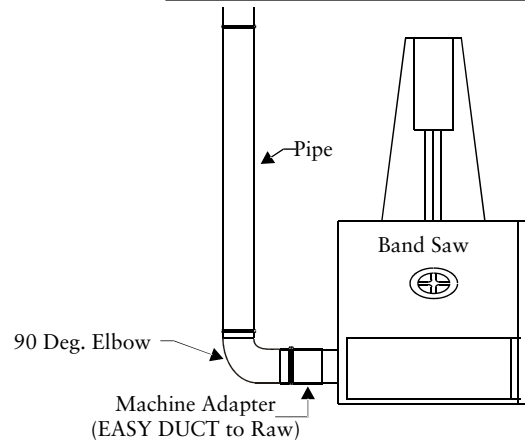


FLEX HOSE TO MACHINE


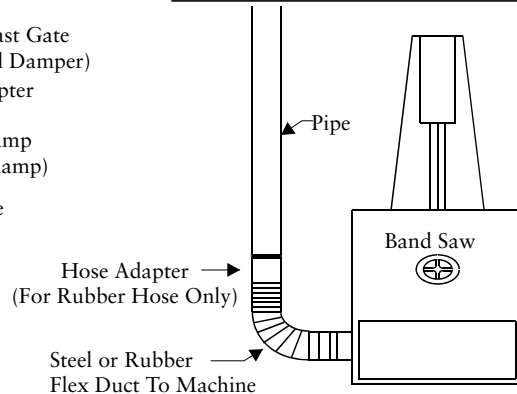


Branch Styles



BRANCHES STANDARD

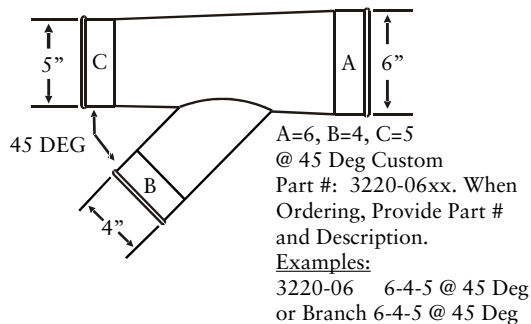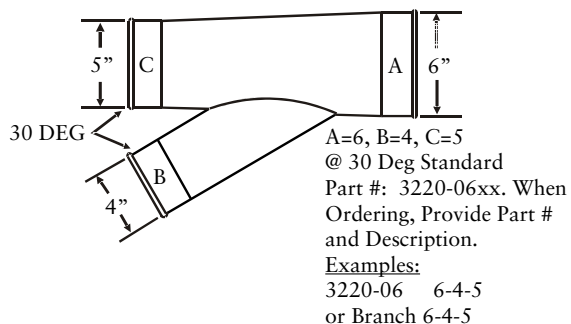


DOUBLE BRANCHES

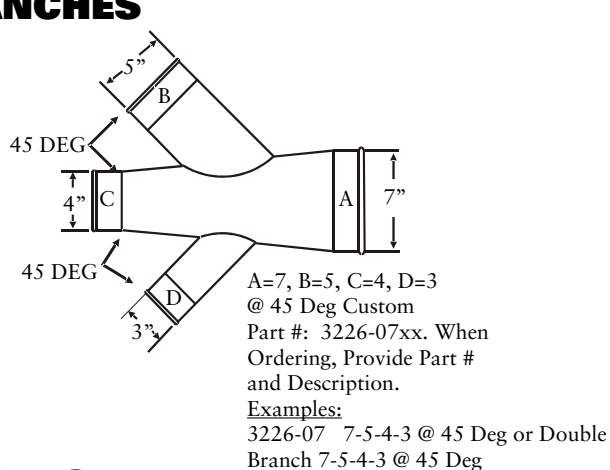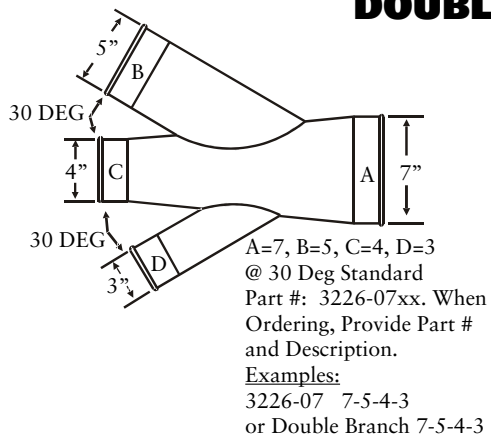


Y-BRANCHES

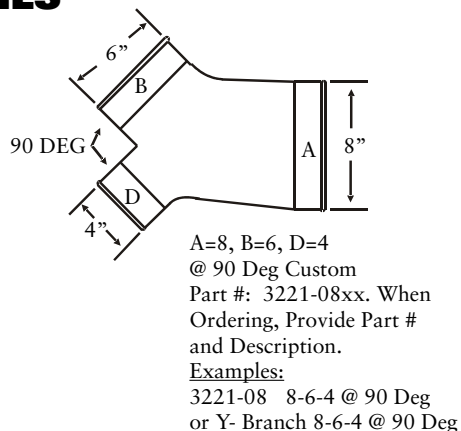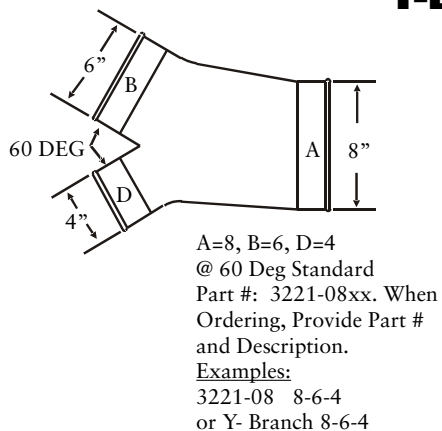


T-BRANCHES

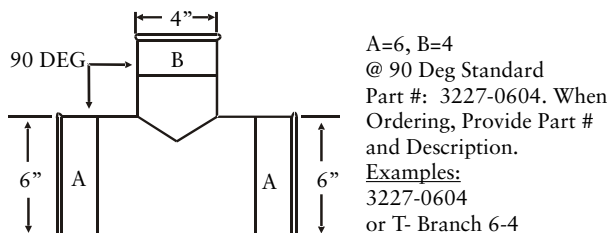


Reducer Styles

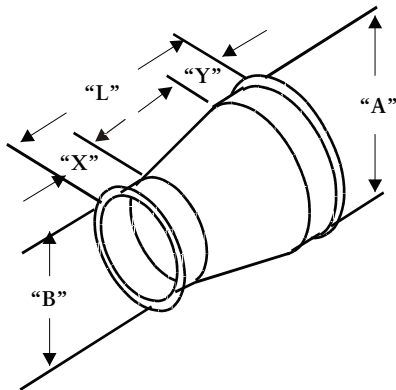

“EASY DUCT STYLE”

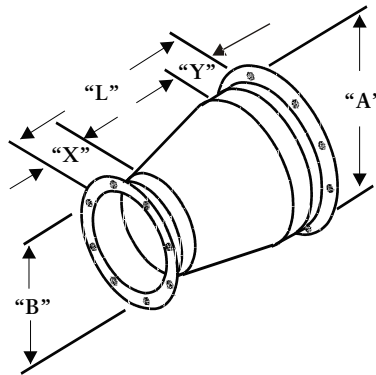

“FLANGED STYLE”

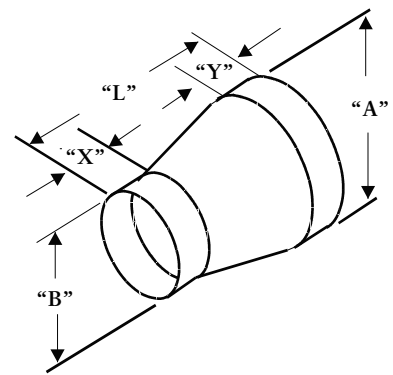

“RAW END STYLE”

A) Reducers are produced by the following formula:

$$\begin{aligned} \text{“EASY DUCT” LENGTH} &= (A-B) + 6 \text{ [7" MIN]} \\ \text{“FL” LENGTH} &= (A-B) + 8 \text{ [9" MIN]} \end{aligned}$$


B) Material gauges as follows:

| DIA. | GALV. GAUGE | SS GAUGE |
|-----------|-------------|----------|
| 4" - 12" | 22 | 22 |
| 14" - 22" | 20 | 20 |
| 24" - 40" | 18 | 18 |


NOTE: Any combination of the above style are available upon request. Please specify all the required dimensions and all reducer end configurations (Raw ID, Raw OD Style, EASY DUCT Style, Flange Style, Etc.).

| Item# | Qty | “A” | Style “EASY DUCT” “Flange” “Raw” | “B” | Style “EASY DUCT” “Flange” “Raw” | “L” (A-B+6) | “X” STD-2” | “Y” STD-2” | Part Gauge | Flange Material | Flg Dwg | Special Notes |
|-------|-----|-----|---|-----|--|----------------|---------------|---------------|---------------|--------------------|------------|---------------|
| | | | | | | | | | | | | |
| | | | | | | | | | | | | |
| | | | | | | | | | | | | |
| | | | | | | | | | | | | |
| | | | | | | | | | | | | |
| | | | | | | | | | | | | |

Sizing Branches

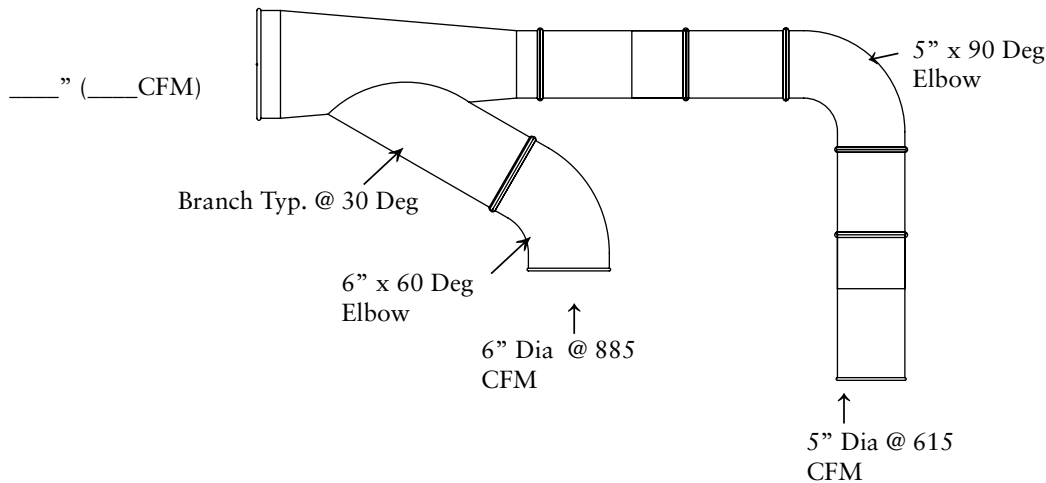

EXAMPLE: Always work from your machines back toward the filter. Suppose that you have a 5" drop that rises and runs back to join with a 6" drop as sketched above. What size branch will you need?

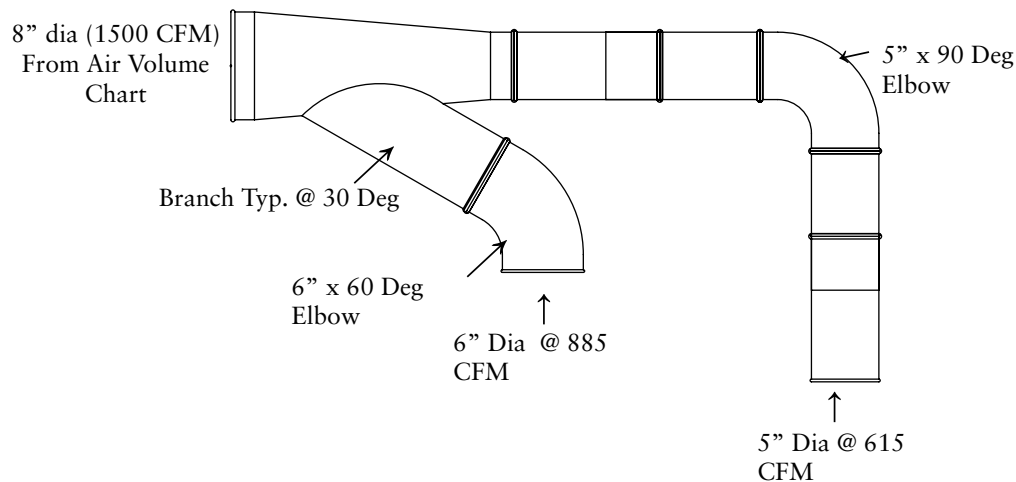

The 5" pipe carries 615 CFM at 4500 FPM, (See Chart). The 6" pipe will need 885 CFM at the same velocity (See Chart). Added together you have a total of $(615 + 885)$ 1500 CFM coming together. Looking again at the chart under 4500 FPM, you find that 1500 CFM is not listed, but falls very close to the 1570 CFM listed for an 8" pipe. This indicates that the 5" joined to the 6" will require an 8" pipe to carry all of the material at the right velocity. The branch, therefore, will be 8" on the downstream end reducing down to a 5" with a 6" branching off of it. That is listed as a 8-6-5 branch.


Installing an Adjustable Nipple

INSTRUCTIONS FOR USING THE "EASY DUCT" ADJUSTABLE NIPPLE WITH RUBBER O-RING FOR DRY SYSTEM


Each Easy Duct pipe section is 5 ft. in length. To shorten to accommodate an existing span, an adjustable nipple is used.



Measure distance to be spanned.

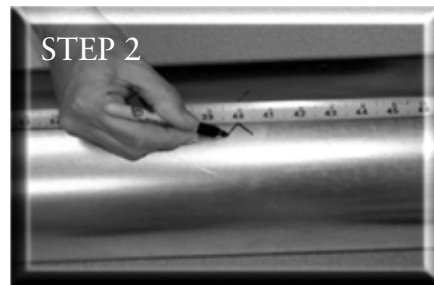

Mark distance to be spanned less 4".

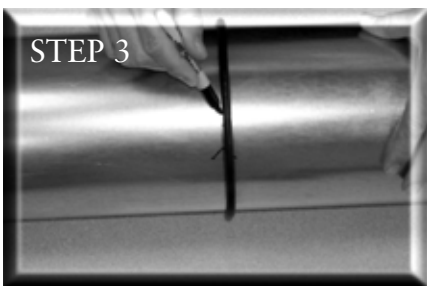

Use O-ring provided and mark for cut.



Drill access hole then cut with saw




Cut piece of pipe put O-ring on cut pipe, slide nipple over



Snap clamp over O-ring and one end of nipple.

FINISHED CONNECTION
USING THE ADJUST
NIPPLE ASSEMBLY.

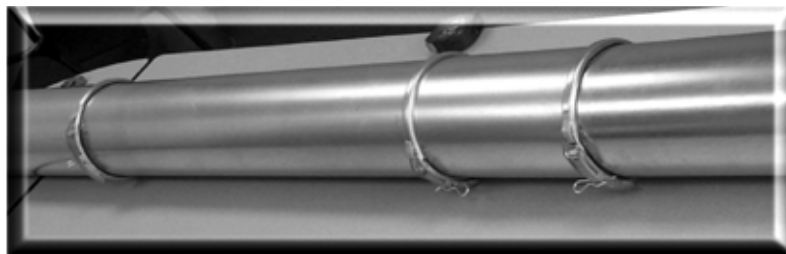


NOTE: KEEP CUT PIPE IN THE DIRECTION AS THE AIR FLOW.

Oil Mist or Wet Application for Pipe

INSTALLATION OF DUAL-GASKETING FOR OIL MIST OR WET APPLICATIONS FOR EASY DUCT STANDARD ROLLED EDGE PIPE

Standard Easy Duct parts are well-suited for most dust, smoke and fume collection systems. However, on oil-mist or other “wet” systems, a dual gasket is recommended to eliminate leakage of materials condensing inside the pipe. Also industry or government regulations occasionally require dual-gasketing on certain dry or fume systems.

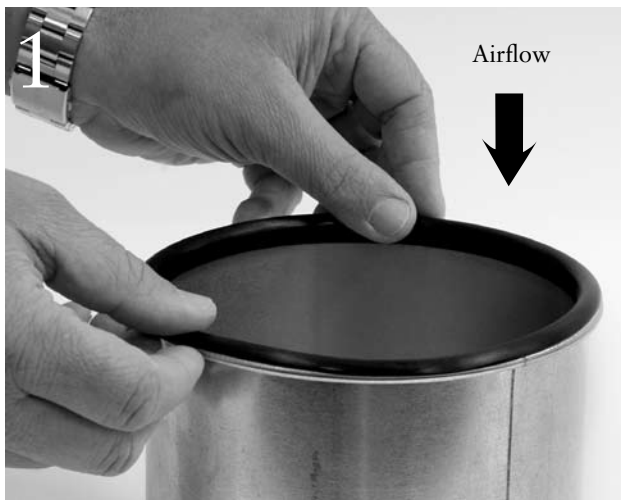

INSTALLING THE OIL MIST GASKET BETWEEN STANDARD ROLLED-EDGE SECTIONS OF PIPE.

1) Carefully place the gasket along the rolled edge of the part, being careful to avoid kinks or voids. Only one gasket is needed per joint.



2) Join the gasketed end of the pipe to a non-gasketed end of the next part in the ducting run using a standard Q-F clamp. The oil-mist gasket, in addition to the gasket inside the Q-F clamp, provides dual protection against leakage.

Oil Mist or Wet Application Installation of Adjustable Nipple



Installing a second o-ring in a Easy Duct adjustable nipple.

1) When a non-standard length of pipe is needed, use a standard Easy Duct Adjustable Nipple to span the gap.

2) Place the small-diameter soft o-ring between the standard o-ring and the rolled edge of the nipple. The soft o-ring should be seated evenly against the rolled edge.

3) Position the larger-diameter standard Easy Duct o-ring above the oil-mist ring.

The order should be as follows:

- a) rolled edge or nipple; against
- b) soft, small-diameter o-ring; against
- c) standard Easy Duct o-ring.

4) Clamp a standard EASY DUCT clamp around both o-rings and the rolled edge. Make sure that both o-rings fit completely under the clamp.

NOTE: KEEP CUT PIPE IN THE DIRECTION AS THE AIR FLOW.

AIR VOLUME CHART (CFM)

| AIR VOLUME IN DUCTS IN CUBIC FEET PER MINUTE (CFM) | | | | | | | | | | | | |
|--|-----------------------------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|--|
| DUCT Ø | VELOCITY IN FEET PER MINUTE (FPM) | | | | | | | | | | | |
| | 2000 | 2500 | 3000 | 3500 | 4000 | 4500 | 5000 | 5500 | 6000 | 6500 | 7000 | |
| 3 | 100 | 125 | 150 | 170 | 195 | 220 | 245 | 270 | 295 | 320 | 345 | |
| 4 | 175 | 220 | 260 | 305 | 350 | 395 | 440 | 485 | 525 | 570 | 615 | |
| 5 | 275 | 340 | 410 | 475 | 545 | 615 | 680 | 750 | 820 | 885 | 955 | |
| 6 | 395 | 490 | 590 | 685 | 785 | 885 | 980 | 1080 | 1180 | 1275 | 1375 | |
| 7 | 535 | 670 | 800 | 935 | 1070 | 1205 | 1335 | 1470 | 1605 | 1735 | 1870 | |
| 8 | 700 | 875 | 1050 | 1220 | 1395 | 1570 | 1745 | 1920 | 2095 | 2270 | 2445 | |
| 9 | 885 | 1105 | 1325 | 1545 | 1765 | 1990 | 2210 | 2430 | 2650 | 2870 | 3090 | |
| 10 | 1090 | 1365 | 1635 | 1910 | 2180 | 2455 | 2725 | 3000 | 3270 | 3545 | 3820 | |
| 11 | 1320 | 1650 | 1980 | 2310 | 2640 | 2970 | 3300 | 3630 | 3960 | 4290 | 4620 | |
| 12 | 1570 | 1965 | 2355 | 2750 | 3140 | 3535 | 3925 | 4320 | 4710 | 5105 | 5500 | |
| 13 | 1850 | 2300 | 2770 | 3225 | 3685 | 4150 | 4610 | 5070 | 5530 | 5990 | 6450 | |
| 14 | 2140 | 2675 | 3205 | 3740 | 4275 | 4810 | 5345 | 5880 | 6415 | 6950 | 7485 | |
| 15 | 2450 | 3070 | 3680 | 4300 | 4900 | 5520 | 6130 | 6750 | 7360 | 7970 | 8590 | |
| 16 | 2790 | 3490 | 4190 | 4885 | 5585 | 6285 | 6980 | 7680 | 8380 | 9075 | 9775 | |
| 17 | 3150 | 3940 | 4730 | 5515 | 6300 | 7090 | 7880 | 8670 | 9450 | 10240 | 11030 | |
| 18 | 3535 | 4420 | 5300 | 6185 | 7070 | 7950 | 8835 | 9720 | 10600 | 11485 | 12370 | |
| 20 | 4365 | 5455 | 6545 | 7635 | 8725 | 9815 | 10910 | 12000 | 13090 | 14180 | 15270 | |
| 22 | 5280 | 6600 | 7920 | 9240 | 10560 | 11880 | 13200 | 14520 | 15840 | 17160 | 18480 | |
| 24 | 6285 | 7855 | 9425 | 10995 | 12656 | 14315 | 15710 | 17280 | 18850 | 20420 | 21995 | |
| 26 | 7370 | 9210 | 11055 | 12900 | 14740 | 16580 | 18420 | 20270 | 22110 | 23950 | 25800 | |
| 28 | 8550 | 10685 | 12820 | 14960 | 17100 | 19230 | 21310 | 23500 | 25650 | 27780 | 29920 | |
| 30 | 9800 | 12260 | 14700 | 17170 | 19625 | 22080 | 24530 | 26990 | 29440 | 31890 | 34350 | |
| 32 | 11160 | 13950 | 16750 | 19541 | 22330 | 25120 | 27910 | 30700 | 33490 | 36280 | 39070 | |
| 34 | 12600 | 15755 | 18905 | 22055 | 25210 | 28360 | 31510 | 34660 | 37810 | 40965 | 44115 | |
| 36 | 14130 | 17665 | 21195 | 24730 | 28260 | 31800 | 35325 | 38860 | 42390 | 45925 | 49455 | |
| 38 | 15745 | 19680 | 23615 | 27550 | 31490 | 35425 | 39360 | 43295 | 47230 | 51170 | 55100 | |
| 40 | 17445 | 21800 | 26170 | 30530 | 34890 | 39250 | 43610 | 47975 | 52330 | 56700 | 61055 | |



The Easy Duct Advantage

- Simple to install, no special tools or training required.
- Clamp-together components can be taken apart and reused.
- Flexible, easily connects to existing ductwork.
- Components and adapters fit every system.
- Adjustable fittings simplify connections.
- Smooth interior



Donaldson®
Filtration Solutions

Donaldson Company, Inc.
Industrial Air Filtration
P.O. Box 1299
Minneapolis, MN 55440-1299

**Call for FREE Duct Design and Layout
EASY DUCT
800-365-1331**

Tel 800-365-1331 (USA)
Tel 800-343-3639 (within Mexico)
dustmktg@mail.donaldson.com